

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21247-00-00
Spot: SENESW Sec/Twnshp/Rge: 9-18S-27W
1650 feet from S Section Line, 2970 feet from E Section Line
Lease Name: BORELL A Well #: 1
County: LANE Total Vertical Depth: 4630 feet

Operator License No.: 5104
Op Name: BLUE GOOSE DRILLING COMPANY, IN
Address: PO BOX 1413
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4414	0	WITH 125 SX CMT
SURF	8.625	345		WITH 225 SX CMT

\$150.48

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 06/22/2007 9:30 AM
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC
Proposal Rcvd. from: _____ Company: _____ Phone: _____

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 06/22/2007 3:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

NO CASING RECOVERED WELL HAD 450 SX LITE CMT PUMPED DOWN BACKSIDE. CASING IS PARTED AT 2470'. COULD NOT GET PAST THAT DEPTH. RECOVERED 2470' OF TUBING. RUN TUBING TO 2400' & PUMP 30 SX COMMON CMT WITH 3% CC. PULLED TUBING TO 1400' & PUMPED 50 SX COMMON CMT W/3% CC. WAIT 1 1/2 HOURS. TRIED TO PRESSURE CASING UP. COULD NOT. CASING HAD A HOLE IN IT AT BRADEN HEAD. RAN TUBING WITH PACKER TO 1250'. COULD NOT GET PACKER TO HOLD. PULLED TUBING & PUMPED 200 SX CMT & 400# HULLS. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 150#. SLOW BLEED OFF OUT OF CASING. TIED ONTO BACKSIDE & PUMPED 1/4 BBL. PRESSURED TO 500# & HELD.

Perfs:


Top	Bot	Thru	Comments
4264	4266		
4229	4232		

INVOICED
DATE 7-11-07
INV. NO. 2008060095

Remarks: USED COMMON CMT W/3% CC & 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 01

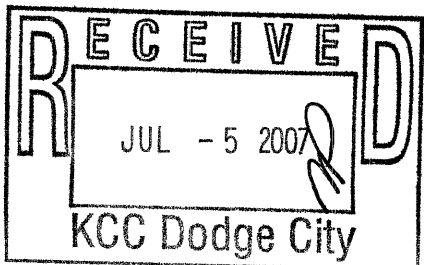

Signed Michael Maier
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION

JUL 09 2007

CONSERVATION DIVISION
WICHITA, KS