

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-20080-00-00
Spot: SESE Sec/Twnshp/Rge: 15-23S-17W
660 feet from S Section Line, 660 feet from E Section Line
Lease Name: WILSON Well #: 1
County: PAWNEE Total Vertical Depth: 4274 feet

Operator License No.: 8061
Op Name: OIL PRODUCERS INC. OF KANSAS
Address: 1710 WATERFRONT PARKWAY
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4200	2050	WITH 100 SX CMT
SURF	8.625	318		WITH 200 SX CMT

\$ 138.91

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/03/2007 2:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: DAVID BRADY Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 4110' & 5 SX CMT. PLUG AT 1100' WITH 15 SX GEL & 50 SX CMT. PLUG AT 345' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/03/2007 4:24 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 4110' & 5 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 1100' WITH 15 SX GEL - 50 SX CMT. 2ND PLUG AT 345' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4160	4166		


INVOICED

DATE 7-11-07
INV. NO. 2008060096

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

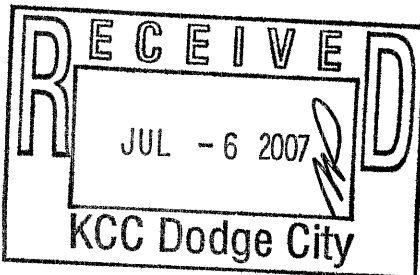

Signed

Richard M. Lacey

(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION Form CP-2/3

JUL 09 2007

CONSERVATION DIVISION
WICHITA, KS

[Signature]
[Signature]