

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-20561-00-00
Spot: S2SWSW Sec/Twnshp/Rge: 6-23S-18W
397 feet from S Section Line, 4485 feet from E Section Line
Lease Name: BOYD Well #: 1
County: PAWNEE Total Vertical Depth: 4385 feet

Operator License No.: 5364
Op Name: BEREN CORPORATION
Address: P.O. BOX 20380
WICHITA, KS 67208

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|-----------------|
| CIBP | | 3950 | | WITH 1 SX CMT |
| CIBP | | 4300 | | WITH 1 SX CMT |
| PROD | 4.5 | 4384 | 453 | WITH 200 SX CMT |
| SURF | 8.625 | 417 | | WITH 250 SX CMT |

\$ 142.51

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/10/2007 1:00 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: MARK LEIKER Company: BEREN CORPORATION Phone: (316) 265-3311

Proposed Plugging Method: CIBP @ 4300' & 2 SX CMT. CIBP @ 3950' & 2 SX CMT. PERFORATE AT 1260' & CIRCULATE OR PLUG AT 1260' WITH 15 SX GEL - 50 SX CMT. PLUG AT 450' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/10/2007 5:26 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

CIBP @ 4300' WITH 1 SX CMT. CIBP @ 3950' & 1 SX CMT. CUT 4 1/2" CASING AT 1226'. PIPE STUCK. PUMPED 15 SX GEL & 50 SX CMT. DISPLACED TO 1000' DOWN 4 1/2" CASING. GOOD CIRCULATION UP 8 5/8" X 4 1/2" ANNULUS. CASING STILL STUCK. CUT 4 1/2" AT 453'. PULLED CASING TO 432'. PUMPED 50 SX CMT. DISPLACED TO 232'. PULLED CASING TO 40' & CIRCULATED HOLE FULL OF CMT WITH 15 SX CMT.

Perfs:


| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 4375 | 4379 | | |
| 4106 | 4111 | | |
| 4012 | 4016 | | |

INVOICED
DATE 8-3-07
INV. NO. 2008060207

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

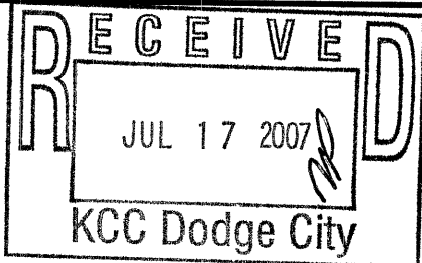

Signed

Richard W. Lacey

(TECHNICIAN) RECEIVED
KANSAS CORPORATION COMMISSION

JUL 30 2007 Form CP-2/

CONSERVATION DIVISION
WICHITA, KS

PKP