

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22040-00-00
Spot: SWSWNW Sec/Twnshp/Rge: 27-24S-13W
2100 feet from N Section Line, 330 feet from W Section Line
Lease Name: MCNAUGHTEN LOAN CO B Well #: 5
County: STAFFORD Total Vertical Depth: 4200 feet

Operator License No.: 33582

Op Name: DAR ENERGY LLC

Address: 300 SW 93RD ST.
OKLAHOMA CITY, OK 73139

String	Size	Depth (ft)	Pulled (ft)	Comment
DVT		1296		WITH 400 SX CMT
PROD	5.5	4198	0	WITH 375 SX CMT
SURF	8.625	316		WITH 275 SX CMT

\$136.50

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 07/11/2007 10:00 AM

Plug Co. License No.: 31925

Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from: RICHARD MCINTYRE

Company: QUALITY WELL SERVICE, INC.

Phone: (620) 786-2001

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING

Plugging Proposal Received By: RICHARD LACEY

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 07/12/2007 9:00 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3700' & 5 SX CMT WITH DUMP BAILER. PRESSURE TESTED 8 5/8" X 5 1/2" ANNULUS TO 500 PSIG WITH 15 SX CMT. RAN TUBING TO 800'. PUMPED 500# HULLS FOLLOWED BY 110 SX CMT DOWN TUBING. CIRCULATED CMT TO SURFACE UP 5 1/2". PULLED TUBING. TRIED TO TOP OFF 5 1/2" WITH 130 SX CMT. COULD NOT LOAD HOLE. WAITED 3 HOURS. PUMPED 40 SX CMT. DID NOT LOAD HOLE. 7/12/07: CMT DOWN 120'. TOPPED OFF WITH SLURRY MIX.

Perfs:

Top	Bot	Thru	Comments
4063	4065		

INVOICED

DATE 8-3-07

INV. NO. 200 8060212

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.


Plugged through: TBG

District: 01

Signed

Richard M. Lacey

(TECHNICIAN)

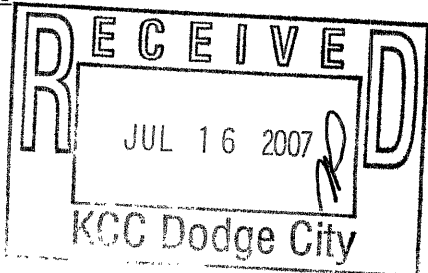

RECEIVED
KANSAS CORPORATION COMMISSION
Form CP-2/3

JUL 30 2007

CONSERVATION DIVISION
WICHITA, KS

PLG