

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22753-00-00
Spot: SENWSE Sec/Twnshp/Rge: 33-30S-13W
1650 feet from S Section Line, 1650 feet from E Section Line
Lease Name: NITTLER Well #: 1
County: BARBER Total Vertical Depth: 4650 feet

Operator License No.: 5046
Op Name: RAYMOND OIL COMPANY, INC.
Address: 155 N MARKET STE 800 PO BOX 48788
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4015	3048	WITH 150 SX CMT
SURF	10.75	256		WITH 220 SX CMT

\$ 151.13

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/02/2007 1:30 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: AL BALMAR Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3850' WITH 4 SX CMT. PLUG AT 790' WITH 10 SX GEL & 50 SX CMT. PLUG AT 290' WITH 75 SX CMT. PLUG AT 40' WITH 25 SX CMT.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 08/02/2007 2:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 3850' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 790' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 290' WITH 75 SX CMT. 3RD PLUG AT 40' WITH 25 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3905	3908		

INVOICED
DATE 8/22/07
INV. NO. 2008060302

RECEIVED
KANSAS CORPORATION COMMISSION


AUG 20 2007

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

CONSERVATION DIVISION
WICHITA, KS

Plugged through: CSG

District: 01

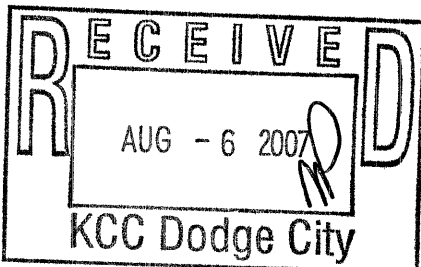

Signed _____

Stephen J. Pfeifer
(TECHNICIAN)

[Handwritten signature]