

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-23252-00-00
Spot: SENE SW Sec/Twnshp/Rge: 20-22S-12W
1690 feet from S Section Line, 2310 feet from W Section Line
Lease Name: NOLTE Well #: 1-B
County: STAFFORD Total Vertical Depth: 3790 feet

Operator License No.: 5614
Op Name: HUTCHINSON, WILLIAM S. DBA HUTC
Address: PO BOX 521
DERBY, KS 67037

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3758	2775	WITH 100 SX CMT
SURF	8.625	311		WITH 280 SX CMT

123.18

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/06/2007 8:30 AM

Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND OFF TO 3470' WITH 5 SX CMT. PLUG AT 700' WITH 10 SX GEL & 50 SX CMT. PLUG AT 325' WITH 50 SX CMT. PLUG AT 30' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 08/06/2007 9:58 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3470' & 5 SX CMT. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 720' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 325' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3618	3624		
3542	3546		SPF
3512	3516		

INVOICED


DATE 8/22/07

INV. NO. 2008060297

Remarks: USED 6/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

District: 01

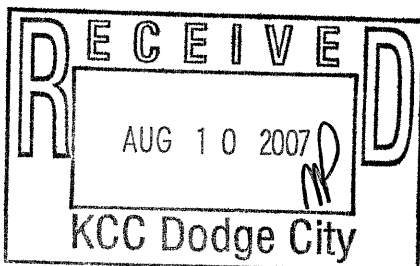

Signed

Richard W. Lacey

(TECHNICIAN) RECEIVED
KANSAS CORPORATION COMMISSION

AUG 20 2007

Form CP-2/3

CONSERVATION DIVISION
WICHITA, KS