

15-163-00877-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Rooks County. Sec. 20 Twp. 9S Rge. 19 (E) (W)
Location as "NE/CNW%SW%" or footage from lines NW SW SW
Lease Owner Petroleum, Inc.
Lease Name GICK 'B' Well No. 1
Office Address 311 East Third, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 26 19 55
Application for plugging filed July 26 19 55
Application for plugging approved July 26 19 55
Plugging commenced July 26 19 55
Plugging completed July 26 19 55
Reason for abandonment of well or producing formation Dry Hole

NORTH

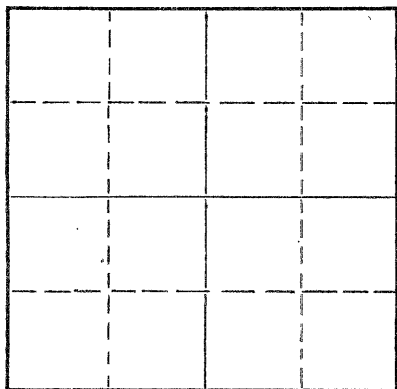

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3640 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	211	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud up with heavy mud to 205' and set 1st wooden

plug at 205', placed 1/2 sack hulls on top of plug

followed by 20 sacks cement. Mud up to 35' and set

second wooden plug at 35' followed by 1/2 sack hulls

and 10 sacks cement to base of well cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Garvey Drilling Company
Address R. R. #2 - Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Karl E. Becker (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Karl E. Becker
311 East Third, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of July, 19 55

My commission expires July 8, 1958

D. M. Kennedy
Notary Public.

PLUGGING
FILE SEC 20 T 9 R 19W
BOOK 138 LINE 4



8/16/55

DIVISION

WELL LOG

15-163-00877-00-00

COMPANY **Petroleum, Inc.**

SEC. **20** T. **9S** R. **19W**

FARM **CECK 'B'**

NO. **1**

LOC. **W 24 SW**


TOTAL DEPTH **3610'**

COUNTY **Rock**

COMM. **July 17, 1955**

COMP. **July 25, 1955**

CONTRACTOR **Garvey Drilling Company**



CASING **3-5/8" @ 210' w/140 cas**

ELEVATION **2120' 1st**
2130' 1st

PRODUCTION **D & A**

FIGURES INDICATE BOTTOM OF FORMATIONS

211	Sand & Shale
390	Shale
1588	Sand & Shale
1582	Anhydrite
2285	Shale & Shells
2735	Lime & Shale
2835	Shale & Shells
3136	Lime & Shale
3160	Lime
3330	Lime & Shale
3500	Lime
3591	Lime & Shale
3610	Lime & Chert
	R.T.D. 3610'

Geological Tops

Hookers: 3293 (-1163)
 Leaning: 3336 (-1206)
 Arbuckles: 3395 (-1165)

State of KANSAS }
 County of SEDGWICK } ss:

I, Karl E. Becker of Petroleum, Inc.

upon oath state that the above and foregoing is a true and correct copy of the log of the CECK 'B' #1 well

PLUGGING
 FILE SEC 20 T 9 R 19W
 BOOK PAGE 138 LINE 4

Karl E. Becker

Subscribed and sworn to before me this 1st day of August 19 55

My Commission Expires: July 8, 1958

D.M. Kennedy
 NOTARY PUBLIC