

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-163-03050-00-00

LEASE NAME Jelinek

WELL NUMBER # 5

330 Ft. from S Section Line

1320 Ft. from E Section Line

SEC. 24 TWP. 9 RGE. 19 NE or (W)

COUNTY Rooks

Date Well Completed 4/5/49

Plugging Commenced 2/25/02

Plugging Completed 2/25/02

RECEIVED  
7/15/02  
JUL 15 2002

TYPE OR PRINT

NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

KCC WICHITA

LEASE OPERATOR Bowman Oil Company

ADDRESS 805 Codell Rd, Codell, KS 67663

PHONE# (785) 434-2286 OPERATORS LICENSE NO. 6931

Character of Well \_\_\_\_\_

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 2/20/02 (date)

by R. Williams (KCC District Agent's Name).

Is ACO-1 filed? yes If not, is well log attached? \_\_\_\_\_

Producing Formation Arbuckle Depth to Top 3586 Bottom 3588 T.D. 3661

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
Arbuckle	oil & water	3586	3588	8 5/8	286	None
				4 1/2	3640	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_ feet to \_\_\_ feet each set. Run tubing to 1395', cemented with 100sx & 500# hulls, circulated pump 50 sx cement, filled ann, shut ann & pumped 100sx down 4 1/2

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Allied Cementing Co Inc License No. \_\_\_\_\_

Address PO Box 31, Russell, KS 67665


NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Bowman Oil Company

STATE OF Kansas COUNTY OF Rooks, ss.

Louis D Bowman for Bowman Oil Company (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Louis D Bowman

(Address) 805 Codell Rd, Codell, KS 67663



SUBSCRIBED AND SWORN TO before me this 15<sup>th</sup> day of July, 2002

Jackie J Langholz  
Notary Public

My Commission Expires: 2-24-2005

COPY


# K. G. S. LIBRARY

WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY  
412 Union National Bldg. Wichita, Kansas

Company - DEREY OIL & GLENN W. PAEL  
Farm - Jolinek No. 5

SEC. 24 T. 9 R. 19W  
CS $\frac{1}{2}$  SW SW

Total Depth. 3661  
Comm. 3-10-49 Comp. 4-5-49  
Shot or Treated.  
Contractor. Glenn Peel Drlg. Co., Inc.  
Issued. 6-4-49

County. Rooks  
KANSAS  


CASING:  
8-5/8" 286' Cemented 200 4  
4-1/2" 3640' Cemented 125 24


Elevation. 2173' KB

Production. 58 bbis.

Figures indicate Bottom of Formations.

surface clay	15
sand	40
clay, shale & shells	287
shale	485
shale & shell breaks	1455
shale, sand & shells	1550
anhydrite	1605
shale	1810
shale & shells	2150
limo brkn	2470
shale & shells	2505
lime & shale	2685
limo brkn	2980
limo brkn & shale	3180
shale & limo	3275
lime brkn	3350
lime	3380
lime cherty	3430
lime RTD	3641
Total Depth lime	3661
Tops:	
Heobner	3314
Lansing	3351
Arbuckle	3586

2173  
1550  
623

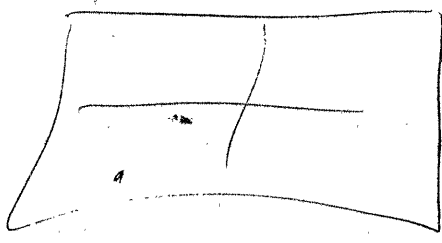

660

RECEIVED  
DEC 26 2001  
KCC WICHITA



MENTING CO., INC.

KS 67665  
483-3887  
(785) 492-5566

\*\*\*\*\*

\* INVOICE \*

Invoice Number: 086660

Invoice Date: 02/28/02

Sold Bowman Oil Company  
To: 805 Codell Road  
Codell, KS  
67663

*pd*  
*3-19-02*  
*#12291*

Due Date.: 03/30/02  
Terms.....: Net 30

Cust I.D.....: Bowm  
P.O. Number...: Jelinek #5  
P.O. Date.....: 02/28/02

Item I.D./Desc.	Qty. Used	Unit	Price	Net	TX
Common	150.00	SKS	6.6500	997.50	T
Pozmix	100.00	SKS	3.5500	355.00	T
Gel	17.00	SKS	10.0000	170.00	T
Hulls	5.00	SKS	18.0000	90.00	T
Handling	272.00	SKS	1.1000	299.20	T
Mileage (31)	31.00	MILE	10.8800	337.28	T
272 sks @\$ .04 per sk per mi					
Plug	1.00	JOB	475.0000	475.00	T
Mileage pmp trk	31.00	MILE	3.0000	93.00	T

RECEIVED

JUL 15 2002

KCC WICHITA

All Prices Are Net, Payable 30 Days Following  
Date of Invoice. 1 1/2% Charged Thereafter.  
If Account CURRENT take Discount of \$ 281.70  
ONLY if paid within 30 days from Invoice Date

Subtotal: 2816.98  
Tax.....: 180.28  
Payments: 0.00  
Total....: 2997.26

*2715.56*