

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rooks County. Sec. 24 Twp. 9 Rge. 19 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NE SE

Lease Owner Morgenstern & Specter

Lease Name Mayhew Well No. 3

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed 11-12-56 19

Application for plugging filed November 1, 1961 19

Application for plugging approved November 2, 1961 19


Plugging commenced December 3, 1961 19

Plugging completed December 27, 1961 19

Reason for abandonment of well or producing formation failure to produce profitably

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

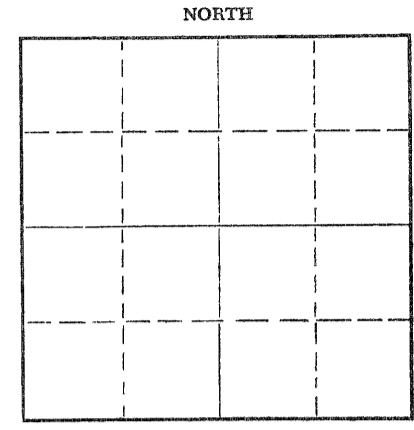

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert P. Leiker Victoria, Kansas

Producing formation Arbuckle Depth to top 3615 Bottom 3617 1/2 Total Depth of Well 3623 1/2 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"OD	193 ft.	none
				5 1/2"OD	3617ft	2815 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3300 feet, Dumped 5 sacks - cement.

Circulated Mud at 550 feet, Pumped 20 sacks cement.

Pumped 20 sacks cement at 180 feet, Set a rock - bridge - at 40 feet. Dumped ten sacks cement.

RECORDED
STATE CORPORATION COMMISSION
11/12/62
12,552
CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Company No. 457

Address R. Rt. 4 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. Specter

Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of January, 1962

My commission expires March 9, 1962

W. W. Dawson
Notary Public.



COPY

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


15-163-03216-00-00

Company- SIERRA PETROLEUM COMPANY, INC.
Farm- Mayhew No. 3

SEC. 24 T. 9 R. 19W
SE NE SE

Total Depth. 3623'
Comm. 11-1-56 Comp. 11-12-56
Shot or Treated.
Contractor.
Issued. 5-11-57

County Rocks KANSAS



Elevation. 2197' DF

Production. 25 BOPD

Figures indicate Bottom of Formations.

surface clay	40
shale	90
sand, gravel	110
shale, shells	640
shale, redbed, & sand	925
shale, sand	1080
sand	1290
red bed	1580
Anhydrite	1615
shale, shells	1880
shale salt	1950
shale, shells, Pyrite	2050
Anhydrite	2075
shale, lime, Pyrite	2140
shale, lime	3378
lime	3603
Conglomerate	3619
Arbuckle	3623
Total Depth	

TOPS	
Anhydrite	1580
Topeka	3133
Heebner	3340
Toronto	3361
Lansing (Scout)	3381
Base/Kansas	
City (Scout)	3585
Conglomerate	3603
Arbuckle	3615

RECORDED
STATE CORPORATION
NOV 1 1957
CONSERVATION DIVISION
Wichita, Kansas