

15-163-20197-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Rooks County, Sec. 17 Twp. 9 Rge. (E) 12 (W) X

Location as "NE/CNW/SW" or footage from lines NW/NW/NE
Lease Owner Clinton Oil Company
Lease Name Heronem Well No. 2
Office Address Box 404 Plainville, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced December 18, 19 72
Plugging completed December 20, 19 72
Reason for abandonment of well or producing formation Depleted

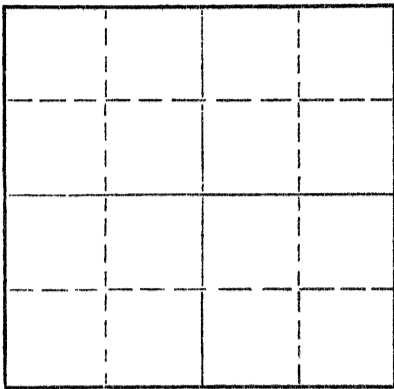

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3532 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	205	None
				5 1/2	3572	2632.26'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured T.D. at 3530 ft. Pushed a plug to 3400 ft., dumped 25 ft. sand and 5 sacks cement. Worked pipe. Shot casing at 2620 ft. Pulled 82 jts. of 5 1/2" casing. Sun squeezed with 3 sacks hulls, 25 sacks gel, 2 sacks hulls, 75 sacks 50/50 Pozmix cement with 6% added gel, and 10 sacks gel. Released the plug and pumped 50 sacks of cement.

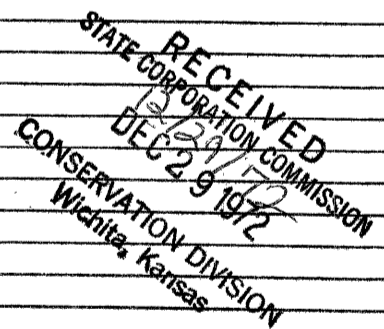


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

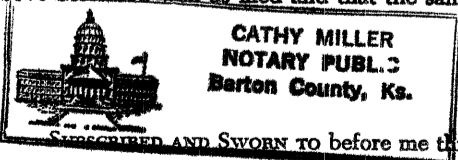

(Signature) James W. Rockhold
Box 698 Great Bend, Ks. 67530 James W. Rockhold
(Address)

Subscribed AND SWORN TO before me this 26th day of December, 1972

Cathy Miller
Cathy Miller Notary Public.

My commission expires September 30, 1975

GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

15-163-20197-00-00

NERONEME #2
 NW NW NE Section 17-35-19W
 Rooks County, Kansas

Commenced: April 2, 1969
 Completed: April 12, 1969

OPERATOR - O. A. Sutton

DEPTH		FORMATION	REMARKS
From	To		
0	40	Soil and post rock	
40	205	Gravel, sand and shale	Ran 6 joints 8-5/8" casing, set @ 205' w/175 sacks cement.
205	970	Shale and shells	
970	1216	Sand	
1216	1485	Shale and red bed	
1485	1522	Anhydrite	
1522	3220	Lime and shale	
3220	3388	Lime	
3388	3413	Lime and shale	
3413	3547	Lime	
3547	3577	Conglomerate and arbuscle	
3577	TD		Ran 113 joints 5-1/2" casing, set @ 3572' w/150 sacks cement.

RECEIVED
 STATE CORPORATION COMMISSION
 12/12/72
 DEC 12 1972
 CONSERVATION DIVISION
 Wichita, Kansas

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the NW NW NE Section 17-35-19W, Rooks County, Kansas, to the best of my knowledge and belief.

E. E. Hall
 E. E. HALL

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 15 day of April, 1969, personally appeared E. E. Hall to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission expires Feb. 1, 1972

Barbara J. Layton
 Barbara J. Layton, Notary Public

