
15-163-04020-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

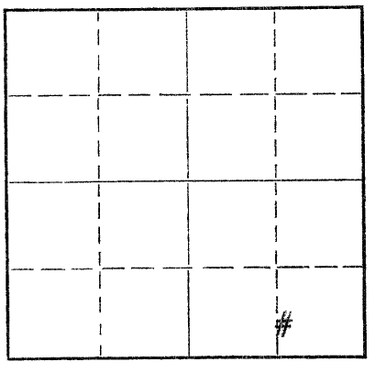

Locate well correctly on above Section Plat

Rooks County. Sec. 18 Twp. 9 Rge. 19 (E) W (W)

Location as "NE/CNW¼SW¼" or footage from lines SW SE SE

Lease Owner Ace Pipe Pulling Co.

Lease Name Rempe Well No. 1

Office Address Box 304 Great Bend, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed Jan 25, 1949

Application for plugging filed Jan 10, 1961

Application for plugging approved Jan 10, 1961

Plugging commenced Jan 23, 1961

Plugging completed Jan 27, 1961

Reason for abandonment of well or producing formation Oil depleted

If a producing well is abandoned, date of last production Jan 10 1961

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Lansing K.C. Depth to top 3348' Bottom 3356' Total Depth of Well 3540 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	171'	none
				4½	3544'	568'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back with sand from 3359' to 3300'. Mixed and dumped 3 sx. cement from 3300' to 3255'. Pulled casing to 500'. Mixed and circulated 16 sx. gel mud. Mixed and pumped in 20 sx. cement from 500' to 440'. Pulled casing to 180'. Mixed and pumped in 20 sx. cement from 180' to 120'. Pulled rest casing. Bailed off gel to 35'. Set 5' rock bridge from 35' to 30'. Mixed and dumped 10 sx. cement from 30' to base cellar.

RECEIVED
STATE CORPORATION COMMISSION
4/6/61
APR 6 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.

Address Box 304 Great Bend, Ks.

STATE OF Kansas, COUNTY OF Barton, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. D. Hoberecht

Great Bend Ks

(Address)

SUBSCRIBED AND SWORN TO before me this 5 day of April, 1961

Gail E. Stimson

Notary Public.

My commission expires June 24, 1963

5441

15-163-04020-00-00

W. D. HOBERECHT

Ace Pipe Pulling Co.

P. O. BOX 304 PHONE GL 3-3602

GREAT BEND, KANSAS

Operator; Ace Pipe Pulling Co.
Box 304
Great Bend, Ks,

Lease; Rempe No.1
SW SW SE of
Sec. 18, Twp,9, Rng. 19,
Rooks County, Ks.

Contractor; W.H. Black
Great Bend, Ks.

Commenced; 1-12-49

Completed; 1-25-49

Formation	Depth
Clay	40
Sand	65
Shale-Sand	90
Shale-Shells-Sand	171
Shale	1260
Anhydrite	1440
Shells-Shale	1480
Salt-Shells	1530
Shale-Shells	1810
Lime-Shale	2180
Lime	3164
Lime-Shale	3465
Lime	3530
Total Depth	3540

Ihereby certify that the above is true and correct to the best of my knowledge.

W D Hoberecht

STATE OF KANSAS)
)ss
CUONTY OF BARTON)

Subscribed and sworn to before me this 5 day of April, 1961.

Clair E Stinson
Notary Public

My Commission expires June 24, 1963

RECEIVED
STATE CORPORATION COMMISSION
APR 6 1961
CONSERVATION DIVISION
Wichita, Kansas