


15-163-20276-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Rooks County, Sec. 18 Twp. 9 Rge. 19 (E) W (W)
Location as "NE/CNWESW2" or footage from lines SE SE SW
Lease Owner Kathol Petroleum, Inc.
Lease Name Marcotte Well No. #1
Office Address 230 Sutton Place, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 12-11 19 69
Application for plugging filed 10-04 19 74
Application for plugging approved 10-07 19 74
Plugging commenced 10-07 19 74
Plugging completed 10-09 19 74
Reason for abandonment of well or producing formation Depleted

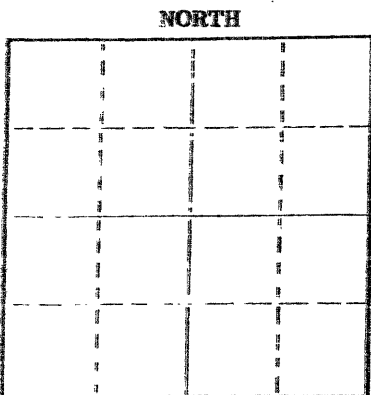

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, P. O. Box 582, Hays, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3556'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED STATE CORPORATION COMMISSION 12/20/74 DEC 20 1974 CONSERVATION DIVISION Wichita, Kansas			8 5/8"	158'	-0-
				5 1/2"	3548 1/2'	1200'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed 5 1/2" wood plug to 1800' & dumped 4 sacks cement with dump bailed.
Pumped down 8 5/8" casing with 20 sacks of gel, 1 hull, 70 sacks cement, 10 sacks gel, released 8 5/8" plug and pumped 50 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kathol Petroleum, Inc.
Address 230 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS COUNTY of Sedgwick
Eugene A. Irsik (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Eugene A. Irsik
230 Sutton Place, Wichita, Kansas
(Address)

Subscribed and Sworn to before me this 19 day of December, 19 74

My commission expires 11-28-77

Clarice Harrison, Notary Public.

15-163-20276-0000

DRILLER'S LOG

Kathol Petroleum, Inc.
900 Sutton Place
Wichita, Kansas 67202

Marcotte #1
Approx. SE SE SW Sec. 18-2S-19W
Rooks County, Kansas

Total Depth: 3556 ft.

Elevation: 2081 K.B.

Commenced: 12-3-69

Completed: 12-11-69
Producer

Contractor: Imperial Oil Co., Rig #2

Casing Record: Set 8 5/8" surface casing at 209' with 165 sacks cement.
Set 5 1/2" production casing at 3345' with 150 sacks cement.

Figures indicate bottom of formations

25' Post rock
209' Sand-shale
1380' Shale-shells
1190' Dakota Sand
1497' Shale-shells
1534' Anhydrite
1650' Shale-shells
2030' Shale-lime
3295' Lime-shale
3525' Lime
3556' Lime-chert
3556' Rotary Total Depth

Electric Log Tops:

Anhydrite 1488 (+ 593)
Topeka 3031 (- 950)
Heebner 3236 (-1155)
Toronto 3258 (-1177)
Lansing 3276 (-1195)
Base Kansas City 3481 (-1400)
Arbuckle 3542 (-1461)
Log Total Depth 3555 (-1474)

We hereby certify this to be a correct and accurate log of the above described well, as shown on the daily drilling reports.

KATHOL PETROLEUM, INC.

By Charley V. Shank
Charley V. Shank
Imperial Oil Co.

Subscribed and sworn to before me this 19th day of February, 1970

Joan Davis
Joan Davis, Notary Public

My Commission Expires:
December 10, 1973

