

State

15-163-19281-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County, Sec. 34 Twp. 9S Rge. 17W (E) (W)

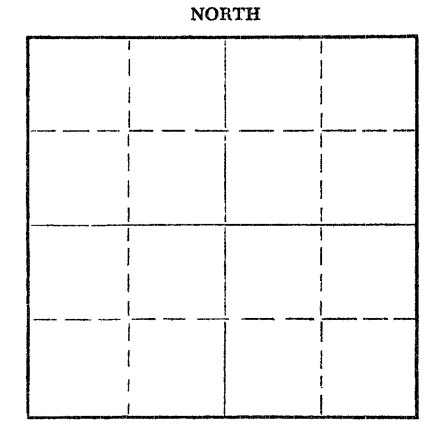

Locate well correctly on above Section Plat

Location as "NE/CNW%SW%" or footage from line SE SE SW
Lease Owner Phillips Petroleum
Lease Name Nettie Well No. D-1
Office Address Box 287, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) SWD well.
Date well completed April, 1949 19
Application for plugging filed 12-13-62 19
Application for plugging approved 12-18-62 19
Plugging commenced 1-21-63 19
Plugging completed 1-21-63 19
Reason for abandonment of well or producing formation Surplus SWD Well.

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes
Name of Conservation Agent who supervised plugging of this well Eldon Petty, Box 326, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 988 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Cheyenne Sand</u>	<u>Water</u>	<u>855</u>	<u>988</u>	<u>6-5/8"</u>	<u>841.10</u>	<u>none</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Pumped 20sx Howco Jel to bottom, followed with 80 sx Howco bulk cement - job completed 2 p.m. 1-21-63. Well plugged and abandoned.

JAN 23 1963
1-23-63
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Halliburton Oil Company
Address Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
M. E. Michael (employee ~~owner~~ (owner ~~operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. E. Michael

SUBSCRIBED AND SWORN TO before me this 22nd. day of January, 19 63

My commission expires Nov. 18th. 1965
Joseph M. Buel Notary Public.



EXPLORATION RECORD

Lease Nettie Well SWD #1

Formation Name	Top	Base	Remarks
Surface Soil	0	10	Elevation: 2040 DF
Post Rock	10	70	
Blue and gray shale	70	75	Top Codell sand 70'
Blue Shale	75	140	
Shale	140	265	
Blue Shale	265	325	
Shale	325	390	
Lime	390	400	
Gray Shale	400	490	
Sand	490	500	
Gray Shale	500	535	
Blue Shale	535	590	
Red Rock	590	600	
Shale	600	615	
Red Rock	615	625	
Sand	625	640	
Red Rock	640	645	
Sand	645	700	Top Dakota Sand 645'
Blue Shale	700	720	
Sand	720	730	
Blue Shale	730	765	
Sandy Shale	765	800	
Shale	800	835	
Sandy Shale	835	840	Top Cheyenne Sand 855'
Lime and Shale	840	855	855 - 875 good porosity
Sand	855	988	880 - 885 Fair porosity
TD		988	928 - 940 good porosity
			940 - 950 poor porosity
			950 - 970 good porosity

RECEIVED
STATE CORPORATION COMMISSION

JAN 23 1963

1-23-63

CONSERVATION DIVISION
Wichita, Kansas