


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

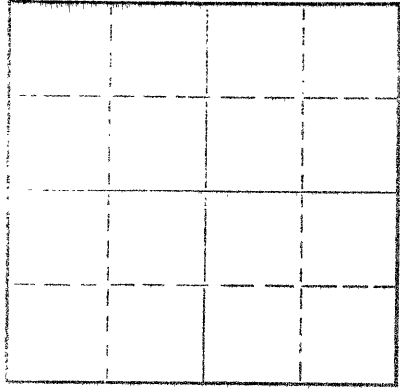

Locate well correctly on above
Section Plat

Rooks County, Sec. 25 Twp. 8 Rge. 18 (E) (W) X
Location as "NE/CNW/SW" or footage from lines C NW SW
Lease Owner Okmar Oil Co.
Lease Name Tanzey Well No. #1
Office Address 1130 Vickers KSB&T Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 11-2-72 19____
Application for plugging approved 19____
Plugging commenced 12-18-72 19____
Plugging completed 12-21-72 19____
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3424' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3415'	696.56'
				12 3/4"	26'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3400'. Mixed and dumped 5 sacks cement thru dump
bailer.
Spot 25 sacks gel and 70 sacks cement through 5 1/2" casing by Halliburton. Spot 10 sacks
gel and 150 sacks cement through casing at 200' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
DEC 26 1972
DEC 26 1972
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec
Box 364 Great Bend, Kansas
(Address)



Subscribed and sworn to before me this 22 day of December, 1972

My commission expires 24 October 1974
Notary Public.


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
412 Union National Bk Bldg., Wichita, Kansas

PHILLIPS PETRO.
Tanzey No. 1.

SEC. 25 T. 8 R. 16W
CNW SW

Total Depth. 3424'
Comm. 10-5-38 Comp. 12-21-38
Shot or Treated. 4000 Gals.
Contractor.
Issued. 1-28-39

County. Rocks



CASING:
12" 26'
6" 3415'

Elevation.

Production. Minimum Well

Figures Indicate Bottom of Formations.

surface chalk	60	live cored	3389
shale & lime shells	510	shale	3395
shale & sand brks	980	linew/shale brks	3415
sand	1030	lime -show oil-	3424
shale	1150	Total Depth.	
shale & red rock	1160		
shale red	1307		
Plugged back with cement from 1307 to 97' on account crooked hole		Top Arbuckle	3415
shale & cement	97- 208		
shale	670		
shale & shells	1038		
red shale & sdy lime	1111		
red rock	1309		
anhydrite	1345		
Top Anhydrite	1310		
brkn shale	1445		
shale	1663		
shale brkn	1814		
lime, shale brks & lime shells	1880		
shale & red rock	1920		
sand	1933		
shale blue, red rock, shells & lime	1992		
shale & red rock	2040		
lime, shells, brkn shale	2170		
Top Ft. Riley	2040		
shale	2190		
lime & lime shells	2200		
lime hrd	2259		
shale & lime	2290		
sand, lime & shale brks	2351		
lime & shale	2370		
sand & shale	2390		
lime & shale	2630		
shale	2683		
lime & shale	2747		
lime, shale & shells	2910		
lime	2920		
Top Topeka	2910		
lime, shale & lime shells	3022		
lime & shale	3051		
lime	3160		
lime	3239		
Top Lans, KC	3160		
brkn lime	3249		
lime	3317		

RECEIVED
STATE CORPORATION COMMISSION
NOV 6 1972
NOV 6 1972
CONSERVATION DIVISION
Wichita, Kansas