

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County. Sec. 29 Twp. 8S Rge. (E)19 (W)

Location as "NE/CNW/SW" or footage from lines E 1/2 NW NW

Lease Owner Rains & Williamson Oil Co.

Lease Name Lowry Well No. 2

Office Address 1425 Wichita Plaza Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 11-13 19 66

Application for plugging filed 11-13 19 66

Application for plugging approved 11-13 19 66

Plugging commenced 11-13 19 66

Plugging completed 11-13 19 66


Reason for abandonment of well or producing formation no oil or gas found in commercial quantities

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3230 Feet

Show depth and thickness of all water, oil and gas formations.

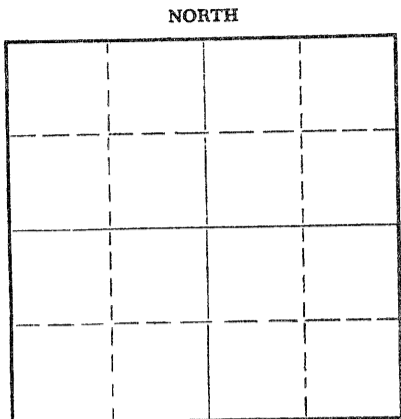

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	230.72'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed plug to 540'. Cemented through drill pipe with 25 sacks cement. Mud back to 220'. Cement through drill pipe with 20 sacks. Mud back to 40' and set solid bridge. Capped with 8 sacks and 2 sacks in rat hole.

RECEIVED
STATE CORPORATION COMMISSION
11-17-1966
NOV 17 1966
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Co.
Address 1425 Wichita Plaza Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Wilson Rains (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains
Wilson Rains
1425 Wichita Plaza Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of November, 19 66

My commission expires _____
Mary J. Brown
Notary Public.

15-163-30255 -00-00

ROTARY DRILLING LOG

Operator: Rains & Williamson Oil Co.
#2 Lowry
E $\frac{1}{2}$ NW NW Sec. 29-88-19W
Rooks County, Kansas

Contractor: Rains & Williamson Oil Co.
Commenced: 11-7-66
Completed: 11-13-66
Remarks: Set 230.72' of 8-5/8" surface
pipe with 160 sacks GL3.

FORMATIONS

Shale	232'
Shale w/Shells	325'
Shale	935'
Sand	1186'
Shale	1452'
Anhydrite	1490'
Shale	1930'
Lime w/Shale	2100'
Lime & Shale	2415'
Lime w/Shale	2570'
Lime & Shale	2850'
Lime w/Shale	3030'
Lime & Shale	3230'
Rotary Total Depth (D&A)	3230'

RECEIVED
STATE CORPORATION COMMISSION
NOV 17 1966
CONSERVATION DIVISION
Wichita, Kansas

We certify the above log is true
and correct to the best of our
knowledge and belief.

RAINS & WILLIAMSON OIL CO.
Wilson Rains
Wilson Rains

Subscribed and sworn to before me, a Notary Public in and for the State of
Kansas, County of Sedgwick, this 16th day of November 1966.

My Commission Expires:
3-3-70

Mary J. Brown
Mary J. Brown, Notary Public