

STATE OF KANSAS
STATE CORPORATION COMMISSION


15-163-00327-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Rocks _____ County, Sec. 9 Twp. 8S Rge. 19 (E) (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE SW
Lease Owner DEEP ROCK OIL CORPORATION
Lease Name Schneider Well No. 1
Office Address Box #1051, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 7 19 51
Application for plugging filed August 21 19 51
Application for plugging approved August 9 19 51
Plugging commenced August 6 19 51
Plugging completed August 6 19 51
Reason for abandonment of well or producing formation _____

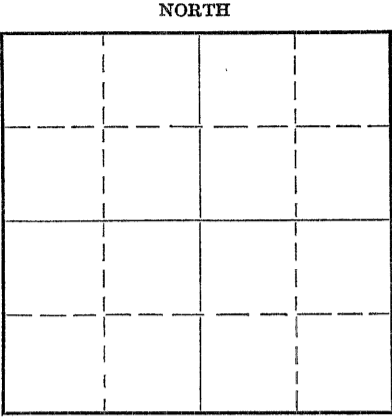

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes, permission obtained from Mr. Eldon Petty

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation Arbuckle Depth to top 3423' Bottom 3475' Total Depth of Well 3475' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	260'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from 3475' to 255'. Set 10' rock bridge, ran 85 sacks cement and 100# calcium chloride, filled hole to 72'. Put in heavy mud from 72' to 15'. Set 3' plug and ran 15 sacks cement, filled to top of hole and into cellar.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Deep Rock Oil Corporation
Address Box #1146, Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Reno, ss.
A.R. Wilson (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) A.R. Wilson

Box #1146, Hutchinson, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of August, 1951

My commission expires _____
23-3273-s 4-50-10M
My Commission Expires August 2, 1953

RECEIVED
STATE CORPORATION COMMISSION
Notary Public.

AUG 23 1951

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 9 T 8 R 19W
BOOK PAGE 101 LINE 32


8-23-51

15-163-00327-00-00

DEEP ROCK OIL CORPORATION
Schneider Well No. 1
Section 9-8S-19W
Rooks County, Kansas

Total Depth: 3475
Commenced: July 6, 1951
Completed: August 7, 1951
Contractor: Creekmore Drilling Company

Surface clay and blue shale	00'	200'
Shale	200'	280'
Sand and shale	280'	1185'
Anhydrite	1185'	1465'
Shale	1465'	1775'
Shale and lime	1775'	2110'
Lime and shale	2110'	2372'
Shale and lime	2372'	2965'
Lime and shale	2965'	3220'
Lime	3220'	3275'
Lime and shale	3275'	3423'
Lime	3423'	3433'
Lime and shale	3433'	3475'
Total Depth		3475'



RECEIVED
STATE CORPORATION COMMISSION
AUG 23 1951
CONSERVATION DIVISION
Wichita, Kansas

8-23-51