


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

15-163-00450-0000
WELL PLUGGING RECORD

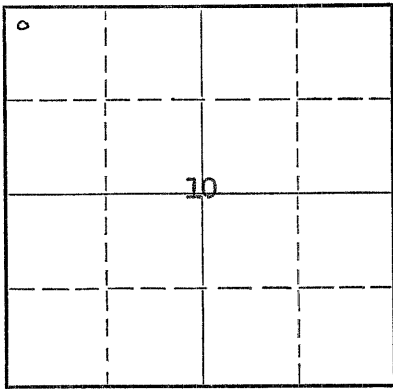

Locate well correctly on above
Section Plat

Rocks _____ County. Sec. 10 Twp. 8 Rge. 19 (E) _____ (W) _____
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____ NW NW NW
Lease Owner Republic Natural Gas Company
Lease Name A. G. Schneider Well No. 1
Office Address Box 126, Ellinwood, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 8-8 19 52
Application for plugging filed 8-8 19 52
Application for plugging approved Verbal approval 8-8 19 52
Plugging commenced 8-8 8:00 PM 19 52
Plugging completed 8-8 8:00 PM 19 52
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Arbuckle Depth to top 3445' Bottom 3505' Total Depth of Well 3505' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Blue Shale	Fresh water	4'	237'	8-5/8"	237'	None
Lansing	Dry	3140'	3370'			
Arbuckle	Dry	3445'	3505'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3505' - 220' - 11# Rotary mud
220' - 140' - Cement (25 sacks)
140' - 63' - Mud (7 bbls.)
63' - 0 - Cement (20 sacks)

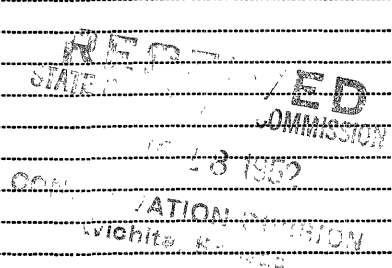

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Nye Drilling Company 87852
Address Hays, Kansas


STATE OF KANSAS, COUNTY OF BARTON, ss.
P. B. Horst (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) P. B. Horst
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 16 day of August, 19 52

My commission expires 8-20-55
Yvonne M. Stevenson Notary Public.

23-8390-s 6-51-20M



15-163-00450-00-00

Driller's Log

Company: Republic Natural Gas Company
Well: Schneider #1
Location: NW NW NW Section 10-8-19W
County: Rooks County, Kansas
Contractor: Nye Drilling Company
Commenced: 7-24-52
Completed: 8-8-52

0 - 35	Post rock
35 - 127	Shale and sand
127 - 560	Shale
560 - 720	Sand
720 - 1170	Shale and sand
1170 - 1400	Shale and red bed
1400 - 1435	Anhydrite
1435 - 1690	Shale and red bed
1690 - 1925	Shale and shells
1925 - 2230	Lime and shale
2230 - 2400	Shale and lime
2400 - 2640	Lime and shale
2640 - 2980	Shale and lime
2980 - 3035	Lime and shale
3035 - 3088	Shale and lime
3088 - 3137	Lime and shale
3137 - 3445	Lime
3445 - 3505	Dolomite
3505	R.T.D.

RECEIVED
CORPORATION COMMISSION

AUG 13 1952

8-18-52

CONSERVATION DIVISION

Wichita, Kansas

PLUGGING
FILE SEC 10 + 8-19W
BOOK PAGE 37 + 1

REPUBLIC NATURAL GAS COMPANY
 311 SOUTH AKARD STREET
 DALLAS 2, TEXAS

15-163-00450-00-00

FIELD ORDER No. 35107

TO State Corporation Commission - Conservation Div
 ADDRESS 800 Flitting Bldg, Wichita, Kansas
 DELIVER TO Paul Haret
 INTENDED USE Plugging assessment to plug well.

DISTRICT Ellinwood, Kansas
 DATE 8-18 1952
 LOCATION Schneider
 WELL NO. #1 A.F.E. 1087

RETAIN THIS COPY FOR YOUR FILES

QUANTITY	DESCRIPTION	PRICE
	For Plugging Assessment as follows: Schneider Well No. 1 no plug 10-8-1944 Rooks County	\$25.00
	note: Written application, well log and well plugging record was furnished to your office 8-16-52	

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 19 1952
 PLUGGING
 CONSERVATION DIVISION
 FILE SEC 10-T-40-R-24
 BOOK PAGE 37 WE 1

INSTRUCTIONS AND CONDITIONS

1. RENDER ITEMIZED INVOICE IN TRIPLICATE AND MAIL PROMPTLY TO ABOVE ADDRESS.
2. RENDER SEPARATE INVOICE FOR EACH ORDER AND SHOW ABOVE NUMBER THEREON. OTHERWISE INVOICE WILL BE RETURNED UNPAID.
3. TERMS: SHOW CASH DISCOUNT ON FACE OF INVOICE. WHEN INVOICES SUBJECT TO DISCOUNT ARE NOT MAILED ON DATE OF SHIPMENT, DISCOUNT PERIOD WILL BE CALCULATED FROM DATE INVOICE IS RECEIVED.

SALES ORDER
 File no. 37-1

REPUBLIC NATURAL GAS COMPANY

BY J.B. Short