

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
311 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County. Sec. 20 Twp. 8 Rge. 19 (E) (W) x

Location as "NE/CNW/SW" or footage from lines SE SW SW

Lease Owner Francis Oil & Gas Co.

Lease Name Bray Estate Well No. #1

Office Address Box 591 Hays, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 12-9-63 19

Plugging completed 12-11-63 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

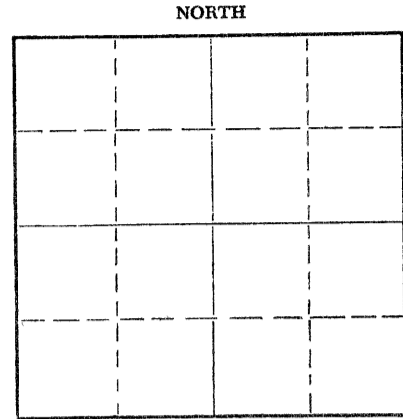

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made plug back with sand to 3450', mixed and ran 4 sacks cement thru dump baler.
Circulated hole with 25 sacks gel and spotted 20 sacks cement at 550'.
Pulled 10 joints, spotted 20 sacks cement at 210', pulled 7 joints.
Mudded hole to 35', set 5' rock bridge, mixed and ran 10 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
WICHITA, KANSAS

DEC 16 1963 12/16/63

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer dec
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14 day of December, 19 63

My commission expires 24 October 1964
Sidney D. Miller
Notary Public.

15-163-00820-05-00

DRILLER'S WELL LOG

OPERATOR: HERMAN GEORGE KAISER
905 Palace Building
Tulsa, Oklahoma

WELL NAME: #1 BRAY
LOCATION: SE SW SW
section 20-8S-19W
Rooks County, Kansas

CONTRACTOR: **K & E DRILLING, INC.**
719 UNION CENTER BLDG.
WICHITA, KANSAS

COMMENCED: November 20, 1960
COMPLETED: November 28, 1960

CASING RECORD: 8 5/8" @ 258' w/150 sx
5 1/2" @ 3462' w/125 sx

ELEVATION:

ROTARY TOTAL DEPTH: 3466'

PRODUCTION:

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Surface soil	30
Shale & shells	259
Shale	550
Shale and sand	950
Sand	1180
Red bed and shale	1459
Anhydrite	1493
Shale and shells	1710
Shale and shells	1990
Lime and shale	2195
Lime	2335
Lime and shale	2612
Lime	2820
Shale	2975
Shale and lime	3165
Lime	3466 TD

RECEIVED
STATE CORPORATION COMMISSION
JAN 23 1964 1/23/64
CONSERVATION DIVISION
Wichita, Kansas

CERTIFICATION

State of KANSAS }
County of SEDGWICK } ss:

I, Wayne L. Brinegar, of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

Wayne L. Brinegar
Wayne L. Brinegar

Subscribed and sworn to before me this 6th day of December, 19 60.

My Commission expires: October 30, 1961

Wildalee Wind
Wildalee Wind - Notary Public.

