


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

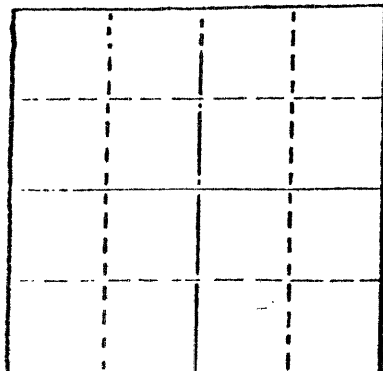

Locate well correctly on above
Section Plat

Rooks _____ County. Sec. 31 Twp. 8 Rge. 18 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines _____
990' FSL & 1650' FEL

Lease Owner Graham-Michaelis Corporation
Lease Name Andreson Well No. 1-31

Office Address Box 247 Wichita, Kansas 67201

Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole

Date Well completed 4-28- 19 82

Application for plugging filed 4-28 19 82

Application for plugging approved 4-28 19 82

Plugging commenced 4-28 1:00 AM 19 82

Plugging completed 4-28 3:00 AM 19 82

Reason for abandonment of well or producing formation _____
Dry Hole

If a producing well is abandoned, date of last production _____
19 _____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Carl Goodrow

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 13482'

Show depth and thickness of all water, oil and gas formations. 8 5/8 set @ 249'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Filled hole to 600' with heavy mud and mixed 70 sacks of cement and pumped in hole thru drill
pipe.

Filled hole to 260' with heavy mud and mixed 40 sacks of cement and pumped in hole thru drill
pipe.

Filled hole to 40' built bridge pushed down plug and mixed 10 sacks and poured cement to bottom
of cellar; mixed 10 sacks and poured into the rat hole.

All cement used was 50-50 Poz Mix 4% Gel 3% CC

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Revlm Drlg., Inc.

STATE OF Kansas COUNTY OF Russell, ss.
Stanley C. Lingreen (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.



(Signature) Stanley C. Lingreen
Box 293 Russell, Kansas 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of April 19 82

Paula J. Gibson
Notary Public.

My commission expires November 10, 1984

RECEIVED
CONSERVATION DIVISION
Wichita, Kansas
MAY 14 1982