


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD Strike out upper line when reporting plugging of formations.

NORTH



Locate well correctly on above Section Plat

Rooks County. Sec. 33 Twp. 8S Rge. 18W (E) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SW/4 SW/4 SE/4
Lease Owner. Prime Drilling Co. and J. M. Huber Corp.
Lease Name. Bieker Well No. 1
Office Address. 3111 Apco Tower, Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed. August 17, 1949
Application for plugging filed. August 17, 1949
Application for plugging approved. August 17, 1949
Plugging commenced. August 17, 1949
Plugging completed. August 17, 1949
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. E. R. Petty
Producing formation. Depth to top. Bottom. Total Depth of Well. 3540 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 195 feet, cemented with 15 sacks cement, filled hole to 40 feet, set plug and cemented 15 sacks cement.

RECEIVED
Conservation Div.
SEP 21 1949
STATE CORPORATION COMMISSION
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Prime Drilling Company
Address 3111 Apco Tower, Oklahoma City, Oklahoma

STATE OF OKLAHOMA, COUNTY OF OKLAHOMA, ss.

L. J. Kruse (employee of owner) ~~XXXXXXXXXXXX~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) L. J. Kruse

3111 Apco Tower Building, Oklahoma City, Oklahoma
(Address)

SUBSCRIBED AND SWORN to before me this 12 day of September, 1949

Harold Purles
Notary Public.

My commission expires March 13, 1953

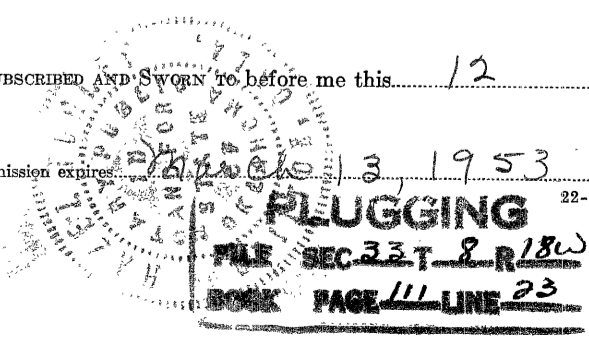

DRILLER'S LOG

COMPANY: HUBER & PRIME
 CONTRACTOR: PRIME
 FARM NAME: #1 BIEKER
 COMMENCED: 8-4-49
 COMPLETED: 8-17-49

LOCATION: SW SW SE, 33-85-18W
 Rocks County, Kansas
 ELEVATION: 1987
 PRODUCTION: DRY & ABANDONED

CASING USED: 8 5/8" at 195' with 125 sacks

Surface Clay	60	<u>SAMPLE TOPS:</u>	
Sand	100	Severy Sand	2824
Shale	180		D.S.T. 2883-91, open 55 minutes, recovered
Shale & shells	195		330' of blackish water.
Shale	360	Topeka	2918
Shale & shells	855	Heebner	3145
Sand	1080	Toronto	3166
Shale & shells	1360		D.S.T. 3157-80, open 30 minutes, blow 5 minutes,
Anhydrite	1395		recovered 8' mud.
Shale & shells	1440	Lansing	3184, show oil 3220-25
Red bed & shale	1480		D.S.T. 3213-36, open 1 hour, recovered 66' salt
Shale & shells	1700		water & mud, very slightly gas cut.
Salt & shells	1765		Bottom hole pressure 950#. Show oil
Lime & shale	1900		3265-72.
Lime, shale & shells	1975		D.S.T. 3255-75, open 30 minutes, recovered 6'
Lime & shale	2080		of very slightly gas cut mud.
Shale & lime	2495	Arbuckle	3517, Total depth 3540'
Lime & shale	2884		Ran Schlumberger, DRY & ABANDONED.
Sand	2891		
Lime & shale	3045		
Lime	3150		
Lime & shale	3180		
Lime	3415		
Lime & shale	3490		
Chert	3525		
Cherty lime	3540		
Total depth	3540		

STATE OF KANSAS)
) (SS
 COUNTY OF SEDGWICK)

I, Edward A. Huffman, hereby certify that the above is a true and correct copy of the log on the No. 1 Bieker, located in the Southwest Quarter of the Southwest Quarter of the Southeast Quarter (SW SW SE) of Section Thirty-three (33), Township Eight (8) South, Range Eighteen (18) West, Rocks County, Kansas.

Edward A. Huffman
 Edward A. Huffman, District Manager
 J. M. HUBER CORPORATION

Subscribed and sworn to before me this 6 day of Sept, 1949

Barth J. Reuss
 Notary Public

My Commission Expires Jan. 26, 1953

RECEIVED
 DIV.
 SEP 21 1949
 SEP 21 1949
 ST. CORPORATION
 DIVISION
 KANSAS