


15-163-19162-00-01

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Locate well correctly on above
Section Plat

Rooks County. Sec. 33 Twp. 8S Rge. 19 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C/NE NE

Lease Owner Frontier Oil Company
Lease Name Lowry Well No. 1-SWDW
Office Address 1720 Ks St Bank Bldg., Wichita, Ks
Character of Well (Completed as Oil, Gas or Dry Hole)
SWDW / ABANDONED

Date Well completed September 25 1946
Application for plugging filed February 16, 1982
Application for plugging approved February 18, 1982
Plugging commenced March 3, 1982
Plugging completed March 3, 1982
Reason for abandonment of well or producing formation

THIS OLD SWDW HAD BEEN ABANDONED PRIOR TO LEASE PURCHASE

If a producing well is abandoned, date of last production
n/a 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Dennis Hamel
Producing formation n/a Depth to top Bottom Total Depth of Well 3487
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 1/2"	1428'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Mud & Gel to 340' / Set Plug &
Cmt from 340 to surf w/235 sx + 6 sx hulls
cmt circulated to surf.

RECEIVED
STATE CORPORATION COMMISSION

MAR 11 1982

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.
George A. Angle (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature)

George A. Angle
1720 Ks St Bank Bldg., Wichita, Ks 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of March, 1982

My commission expires 5-14-85

Notary Public.





15-163-19162-00-07

W. H. BIRD et al

#1 Lowery

on/2 NE/4 NE/4 33-8-19W
Rocks County, Kansas

Salt Water Disposal

CORPORATION
CONSERVATION DIVISION

Elevation 1988'

800 BILBOE BUILDING
WICHITA, KANSAS

Hardman

- 3484-3550 Tight crystalline dolomite - spotted porosity - few shale stringers
- 3475 Crystalline dolomite - good porosity
- 3485 Tight Crystalline dolomite
- 3610 Crystalline porous dolomite
- 3660 Tight crystalline dolomite - streaks of shale - spotted porosity
- 3730 Crystalline dolomite - medium porosity
- 3750 Tight crystalline dolomite
- 3750 About same plus some spotted good porosity
- 3800 Medium tight crystalline dolomite

2. Assessment, payable within 30 days (30) of the submission of this statement, shall be made to the State Treasurer, Department of Finance, State of Kansas, 1000, Republic Building, Topeka, Kansas. The amount of the assessment is determined and approved by the Commission. Order No. 28-01-01.

GEOLOGICAL DATA

IN ACCOUNT WITH - CONSERVATION DIVISION
Top Arbuckle 3437 D.F.
800 BILBOE BUILDING
WICHITA, KANSAS 3800 D.F.

51 5 1/2" Cemented @ 3535 D.F. (200 sax)

- Soft porous zones 3535-68 & 3584-98 & 3601-10 & 3618-34 & 3649-57 & 3662-3706 & 3742-48

LEASE

NO. 1


Assessment for one Lease

Assessment for additional Leases

NO. 2 18.00

Assessment for above Order

Payable to order of 11/25 1927

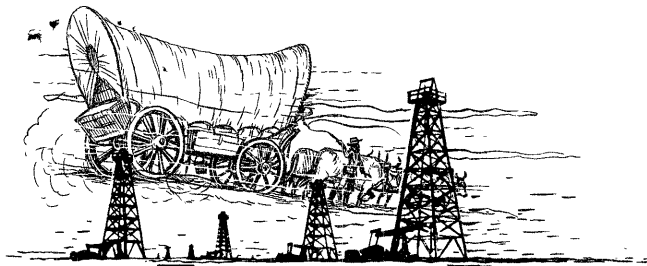

15-163-19162-00-01

FRONTIER OIL COMPANY

1720 KANSAS STATE BANK BUILDING

WICHITA, KANSAS 67202

TELEPHONE 316-263-1201

February 16, 1982

Mr. Rex Krieg
STATE CORPORATION COMMISSION
Conservation Division
200 Colorado Derby Building
Wichita, Kansas 67202

RECEIVED
STATE CORPORATION COMMISSION
FEB 17 1982 2/17/82
CONSERVATION DIVISION
Wichita, Kansas

Dear Mr. Krieg:

We spoke on the phone last week concerning an old, abandoned SDW located on a lease which Frontier Oil Company obtained production on in 1981, our Lowry lease in the N/2 Sec. 33-8S-19W, Rooks County, Kansas. The old well in question was drilled by Amerada in 1946 and was apparently operated as a disposal well for a period of time, then abandoned prior to our obtaining the lease.

You wrote Mr. Angle on the 11th stating that this well should be plugged by March 11, 1982, following a complaint lodged by the landowner stating that he wished it plugged.

In compliance with your letter, I am enclosing our Plugging Application Form and it is our intention to plug this well as soon as we receive the authority to do so. Please understand that since Frontier Oil Company never operated this old well, we have no records on it other than that available on the Independent Oil & Gas Service scout card. For this reason we will not be able to provide the drillers log, etc. as usually received by the State Corporation Commission with our Plugging Application.

If you have any questions, please call me. We will expect to receive the authority to plug this well within the next week or so.

Sincerely,

FRONTIER OIL COMPANY

A handwritten signature in cursive script that reads "Jean B. Stocks".

Jean B. Stocks

jbs