


15-163-20546-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

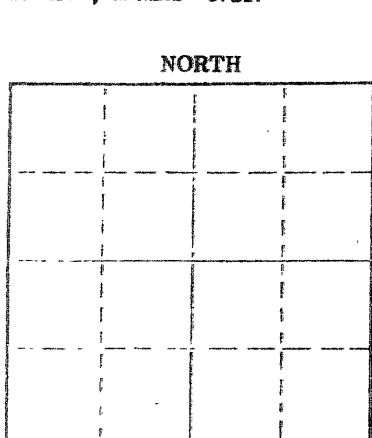

Rooks County, Sec. 34 Twp. 8 Rge. (E) 19 (W)  
Location as "NE/CNW&SW&W" or footage from lines NW NW NE  
Lease Owner Petroleum, Inc.  
Lease Name Veverka G Well No. 1  
Office Address R. H. Garvey Bldg, 300 W. Douglas, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed November 29 19 74  
Application for plugging filed November 29 19 74  
Application for plugging approved November 29 19 74  
Plugging commenced November 29 19 74  
Plugging completed November 29 19 74  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3415 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with columns: FORMATION, CONTENT, FROM, TO, SIZE, PULLED OUT. Includes a 'RECEIVED' stamp from the State Corporation Commission, Conservation Division, Wichita, Kansas, dated DEC 4 1974.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set plug @ 550' w/70 sacks 50/50 pozmix w/6% Gel. Come up hole to 185'-  
set plug w/20 sacks 50/50 pozmix, 6% Gel. Top plug set @ 40' w/1/2 sack  
hulls and 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Duke Drilling Company  
Address Box 823, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON ss.  
Wayne Dobbs

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne Dobbs  
Box 823, Great Bend, Kansas 67530 (Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of December 19 74

My commission expires April 11, 1978  
Notary Public.

15-163-20546-00-00

DRILLERS' WELL LOG

DATE COMMENCED: November 20, 1974  
DATE COMPLETED: November 29, 1974

PETROLEUM, INC.  
VEVERKA "G" #1  
NW NW NE  
Sec 34-T8S-R19W  
Rooks County, Kansas

ELEVATION: 1957 K.B.

0 - 35' Shale  
35 - 45' Post Rock & Hard Sand  
45 - 206' Blue Shale & Sand Streaks  
206 - 505' Shale  
505 - 536' Sand  
536 - 820' Shale & Sand Streaks  
820 - 1095' Red Bed & Sand  
1095 - 1255' Shale & Shells  
1255 - 1366' Shale  
1366 - 1405' Anhydrite  
1405 - 1830' Shale & Shells  
1830 - 3102' Lime & Shale  
3102 - 3106' Shale  
3106 - 3144' Lime & Shale  
3144 - 3387' Lime  
3387 - 3415' Dolomite

FORMATION DATA

Anhydrite 1366  
Heebner 3102  
Toronto 3128  
Lansing 3144  
Arbuckle 3387  
RTD 3415

SURFACE PIPE: Set 206'  
of 8-5/8", 20# pipe with  
130 sacks common cement,  
2% gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS  
COUNTY OF BARTON ) SS

Wayne Dobbs, of lawful age, does swear and state that the facts and  
statements herein contained are true and correct to the best of his knowledge.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 4 1974  
CONSERVATION DIVISION  
Wichita, Kansas  
12/4/74

Wayne Dobbs

Subscribed and sworn to before me this 3rd day of December 1974.

My Comm. Expires:  
April 11, 1978

Verath M. Zlague  
Notary Public