


15-163-20591-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

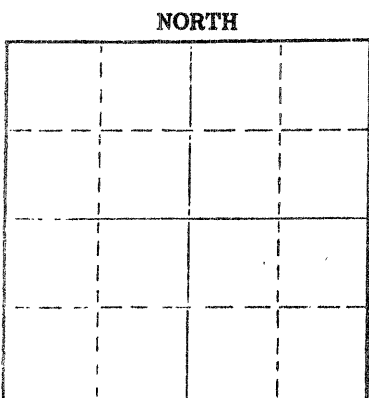

Locate well correctly on above Section Plot

Rooks _____ County. Sec. 26 Twp. 8 Rge. 18 (E) (W)
Location as "NE/CNW/SE/SW" or footage from lines. 330' FSL - 1650' FEL
Lease Owner Cities Service Oil Co.
Lease Name Dechant "A" Well No. 2
Office Address 209 E. William, 700 Sutton Bldg. Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 1-8-76 1-8 1976
Application for plugging filed 1-8 1976
Application for plugging approved 1-8 1976
Plugging commenced 1-8 1976
Plugging completed 1-8 1976
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3530'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	233'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 1497'
Spot 50 sacks regular cement at 1497'
(To be held in abeyance for possible use as SWD well)

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Duke Drilling Company
Address Box 823, Great Bend, Kansas

STATE OF Kansas COUNTY OF Sedgwick

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

Glenn E. Meier
STATE NOTARY PUBLIC
Sedgwick County, Kansas

(Signature) E. W. Peterman E. W. Peterman
Cities Service Oil Co.
209 E. William, Wichita, Kansas 67202 (Address)

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
I produced and sworn to before me this 13 day of January 1976

My commission expires 6-3-77

Glenn E. Meier
Glenn E. Meier Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
7-19-76
JAN 19 1976
CONSERVATION DIVISION
Wichita, Kansas

15-163-20591-00-00

DRILLERS' WELL LOG

DATE COMMENCED: December 29, 1975
DATE COMPLETED: January 7, 1976

Cities Service Oil Company
DECHANT A-2
SE SW SE of Sec 26-T8-R18
Rooks County, Kansas

ELEVATION: 2000 K.S.

0 - 90'	Post Rock and Clay
90 - 232'	Shale and Shells
232 - 1100'	Shale w/sand streaks
1100 - 1330'	Shale, Shells, Red Bed
1330 - 1367'	Anhydrite
1367 - 3130'	Lime and Shale
3130 - 3134'	Shale
3134 - 3402'	Lime
3402 - 3431'	Lime and Shale
3431 - 3480'	Lime, Shale, Chert and Sand
3480 - 3530'	Dolomite
3530'	RTD

FORMATION TOPS

Anhydrite	1330
Topeka	2915
Heetner	3130
Toronto	3152
Lansing	3171
Base K.G.	3402
Jong.	3431
Arbuckle	3480
RTD	3530

SURFACE PIPE: Set 233' of
now 8 5/8", 20# pipe w/175
sacks Common, 3/8 co.

Spot 50 sacks Common @ 1497'
Temporary Abandon.

AFFIDAVIT

STATE OF KANSAS }
COUNTY OF BARTON } ss.

Wayne Dobbs, of lawful age, does swear and state that the facts and
statements herein contained are true and correct to the best of his knowledge.

Wayne Dobbs

Subscribed and sworn to before me this 12th day of January, 1976.

Dorothy M. Hague
Notary Public

My Commission Expires: April 11, 1978

RECORDED
JAN 19 1976
1-19-76