

STATE OF KANSAS
STATE CORPORATION COMMISSION


15-163-62478-00-00
WELL PLUGGING RECORD

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

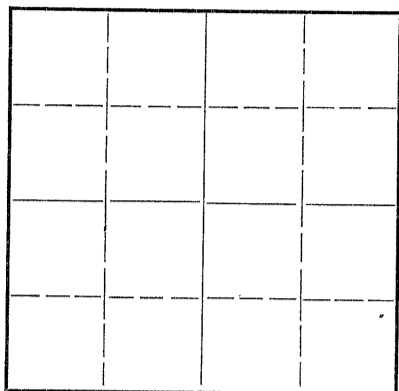

Locate well correctly on above Section Plat

Locs 8000 County Sec 30 Twp 8 Rge. (E) 20 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines 32 1/2 32 1/2 or 32 1/2

Lease Owner **Harbor Drilling Company**

Lease Name **Shaw** Well No. **1**

Office Address **1019 Central Building, Wichita, Kansas**

Character of Well (completed as Oil, Gas or Dry Hole) **Dry hole**

Date well completed **February 14,** 19 **43**

Application for plugging filed **February 16,** 19 **43**

Application for plugging approved **February 16,** 19 **43**

Plugging commenced **February 17,** 19 **43**

Plugging completed **February 17,** 19 **43**

Reason for abandonment of well or producing formation **No producing formation encountered**

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? **Yes**

Name of Conservation Agent who supervised plugging of this well **C. F. Alexander**

Producing formation Depth to top Bottom Total Depth of Well **8718** Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				20 3/4	75	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Rud from 8718 to 800'
Bridged hole with wood plug at 800'
Cement from 800' to 185'
Rud from 185' to 15'
Cement from 15' to 9'

3-5-43

36 8 20W
1200K P. 6.4 34

(If additional description is necessary use BACK of this sheet)
Correspondence regarding this well should be addressed to **Harbor Drilling Company**
Address **1019 Central Building, Wichita, Kansas**

STATE OF **KANSAS** COUNTY OF **SEWICK**, ss.

Jim Adkins, employee of owner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) **Jim Adkins**

Chaney, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this **3rd** day of **March**, 19 **43**

My commission expires **April 7, 1943**

Margaret O. Reilly
Notary Public

15-163-02478-00-00

HARBAR DRILLING COMPANY'S NO. 1 SHAW, SECTION 6, TOWNSHIP 8, RANGE 20, ROOKS CO., KANSAS

Started rigging up 12-14-42
Tearing out tools 2-18-43

Ran 3 joints, 94' of 10 3/4" used 8 thd. surface casing, set at 70', cemented with 40 sacks of cement

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Lime Rock	0	40	
Shale & Shells	40	73	
Lime	73	135	
Shale	135	175	
Sand	175	197	
Shale	197	315	
Shale & Shells	315	500	Slope test 500' OK
Sand & Shells	500	645	
Shale & Shells	645	805	
Lime	805	814	
Shells & Sand	815	890	
Shale & Shells	890	1070	Slope test 1000' OK
Shale & Sand	1070	1170	
Shale & Shells	1170	1220	
Red Bed	1220	1500	
Shale & Shells	1500	1525	
Anhydrite	1525	1575	
Lime & Shale	1575	2120	Slope test 1500' OK
Lime	2120	2140	Slope test 1750' OK
Shale & Lime	2140	2220	Slope test 2000' OK
Lime	2220	2245	
Shale & Lime	2245	2335	Slope test 2250' OK
Lime	2335	2385	
Lime & Shale	2385	2855	Slope test 2500' OK
Shale	2855	2865	
Shale & Shells	2865	2905	
Lime	2905	2910	
Shale & Lime	2910	3225	Slope test 3000' OK
Lime	3225	3555	
Conglomerate	3555	3600	
Chirt & Lime	3600	3635	
Chirt	3635	3675	
Shale & Sand	3675	3680	
Arbuckle Lime	3680	3702	
Lime	3702	3718	
Total Depth		3718	

3-543

STATE OF KANSAS, COUNTY OF SEDGWICK

Jim Adkins, employee of operator of the above-described well, being first duly sworn on oath says: The log of the above-described well is true and correct to the best of my knowledge and belief.

Jim Adkins

Subscribed and sworn to before me this 3rd day of March, 1943.

My commission expires April 7, 1943

Margaret O'Reilly
Notary Public

36 8 20W
64 34