

15-065-00596-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 5 Twp. 8 Rge. 21 W (E) (W)

Location as "NE/CNW/SW" or footage from lines NE SE SE

Lease Owner John P. Jennings

Lease Name Jennings--Kenyon Well No. 1

Office Address 1023 Central Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed February 21 19 58

Application for plugging filed July 3, 19 62

Application for plugging approved July 5, 19 62


Plugging commenced July 12 19 62

Plugging completed July 16 19 62

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production Unknown 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

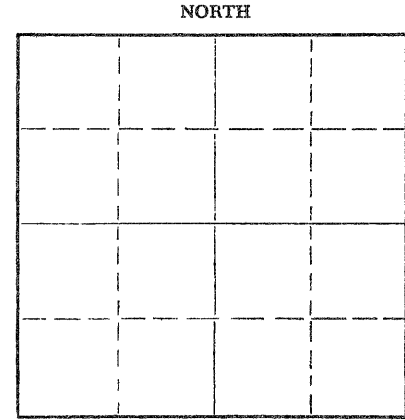

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation LANSING Depth to top Bottom Total Depth of Well 3620 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	233'	
				5-1/2"	3430'	2900'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled back with chat and dumped 5 sacks of cement. Shot pipe off at 2919'. Pulled pipe and circulated into 5" with jel-mud. Spotted 20 sacks of cement through 5" at 500'. Pulled 5" to 200' and spotted with 20 sacks of cement. Dumped 10 sacks of cement at top of surface.

RECEIVED
STATE CORPORATION COMMISSION
JUL 24 1962
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Bert Self for Raymond Oil Company, Inc. 17-24-62
Address 410 Fourth National Bank Building, Wichita 2, Kansas

STATE OF Kans., COUNTY OF Reno, ss.
Employee (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self
R. R. #4, Hutchinson, Kans.
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of July, 19 62

My commission expires October 18, 1965
Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock, Wichita, Kansas

15-065-00596-00-00


COPY

Company- JOHN P. JENNINGS, ETAL
 Farm- Kenyon No. 1

SEC. 5 T. 8 R. 21W
 NE SE SE

Total Depth. 3630'
 Comm. 9-27-57 Comp. 10-3-57
 Shot or Treated.
 Contractor. Strata Drlg.
 Issued. 5-9-59

County Graham KANSAS



Elevation. 2084' R.B.

Production. 26 BOPD/LANSING

Figures Indicate Bottom of Formations.

surface	40
sand & shale	162
shale	440
shale	1425
red rock & shale	1630
Anhydrite	1670
shale shells	2210
lime & shale	3125
lime	3250
lime & shale	3371
lime	3620
lime	3630
Total Depth	

TOPS: SCOUT	
Heebner	3249
Toronto	3272
Lansing	3288

RECEIVED
 STATE CORPORATION COMMISSION

JUL 26 1962

CONSERVATION DIVISION
 Wichita, Kansas

1726-62