


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

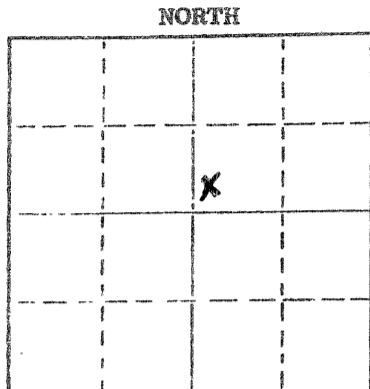

Locate well correctly on above Section Plat

Rooks County, Sec. 35 Twp. 8 Rge. (E) 18 (W)
Location as "NE/CNWKSWX" or footage from lines. Center W $\frac{1}{2}$ -SW-NE
Lease Owner Two Way Oil Company
Lease Name Dechant Well No. 4
Office Address 1000 SW Second - Plainville, Ks. 67663
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 13 1977
Application for plugging filed May 2 1978
Application for plugging approved May 6 1978
Plugging commenced May 8 1978
Plugging completed May 9 1978
Reason for abandonment of well or producing formation Dry Hole
If a producing well is abandoned, date of last production Nil 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,445 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	170 ft.	
				4 1/2"	3,444 ft.	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

May 8, 1978 -- Dumped sand, filled to 3,084 ft. Mixed and dumped three sacks of cement to 3,054'

May 9, 1978 -- Allied Cementing mixed and pumped down 8 5/8" casing 20 sacks gel with 100 lbs hulls, followed with 70 sacks cement displaced with five sacks gel and capped with cementing plug and 60 sacks cement.

- #1 20 sacks gel ----- 1,600 - 600 ft.
- #2 70 sacks cement plug ----- 600 - 400 ft.
- #3 5 sacks gel ----- 400 - 180 ft.
- #4 60 sacks cement plug ----- 180 - 0

Name of Plugging Contractor Brown Bros. Well Service Inc.
Address Box 368 - Plainville, Ks. 67663


STATE OF KANSAS COUNTY OF ROOKS, ss.

Delbert E. Ostrom (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Delbert E. Ostrom
Box 368, Plainville, Kans.

Subscribed and Sworn to before me this 12th day of May, 1978

My commission expires My Appointment Expires May 16, 1982



DREILING OIL, INC.

Victoria, Kansas 67671

WELL LOG

Company	Two Way Oil Co. 1000 SW Second Plainville, KS 67663	Sec. 35	Twp. 8	Req. 18
Farm	Dechant No. 4	Location	C - W $\frac{1}{2}$ - SW - NE	
Total Depth	3,445'	County	Rocks	
Comm.	8-8-77	Comp.	8-13-77	Elevation: 2000
Contractor	Dreiling Oil, Inc. Rt. #1 Victoria, KS 67671			K. B.
			1997	D. F.
			1995	G. R.

Casing Record	Cement Record	Production:
170' - 8 5/8"	130 sacks cement	
3,444' - 4 1/2"	cemented w/150 sacks common	
	10% salt.	

Figures Indicate Bottom of Formations

0'	43'	Post Rock
43'	70'	Post Rock
70'	175'	Blue Shale
175'	1205'	Shale & Sand
1205'	1345'	Shale
1345'	1388'	Anhydrite
1388'	1994'	Shale
1994'	3018'	Shale & Lime
3018'	3445'	Lime
3445'	T.D.	

STATE OF KANSAS)
)ss
 COUNTY OF ELLIS)

I, Joseph A. Hess, Secretary Treasurer of Dreiling Oil, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from the Dechant #4.


 JOSEPH A. HESS

Subscribed and sworn to before me this 16th day of August, 1977

CECILIA BASGALL
NOTARY PUBLIC
STATE OF KANSAS


 Cecilia Basgall Notary Public

My appointment expires: November 17, 1980.

MAY 04 1978
 May 04, 1978
 CONSERVATION DIVISION
 Wichita, Kansas