


15-163-20599-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

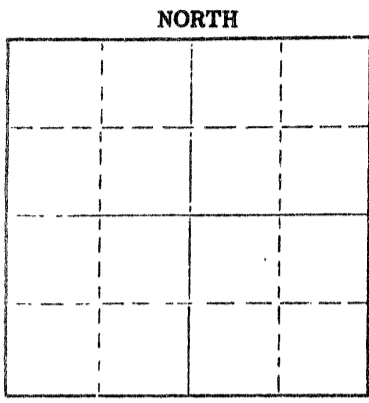

Locate well correctly on above Section Plat

Rooks \_\_\_\_\_ County. Sec. 15 Twp. 8S Rge. 18 (X) (W)  
Location as "NE/CNW/SW" or footage from lines SW SW SW  
Lease Owner Cities Service Oil Co.  
Lease Name Kriley Well No. B-1  
Office Address 209 East William, 700 Sutton Place, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed February 16 1976  
Application for plugging filed February 16 1976  
Application for plugging approved February 16 1976  
Plugging commenced February 16 1976  
Plugging completed February 16 1976  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3425 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

First plug @ 500' w/50 sacks 50/50 Pozmix, 2% Gel, thru drill pipe.  
Come up hole to 185' w/25 sacks cement thru drill pipe.  
Top plug @ 40' w/1/2 sack hulls and 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Duke Drilling Co.  
Address Box 823, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON  
Wayne Dobbs (employee of owner) or (XXXXXXXXXXXX) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne Dobbs  
Box 823, Great Bend, Ks. (Address)

SUBSCRIBED AND SWORN TO before me this 17th day of February, 1976

My commission expires April 11, 1978  
Rosely M. Hague Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 19 1976  
02-19-1976  
CONSERVATION DIVISION  
Wichita, Kansas

DRILLERS' WELL LOG

15-163-20599-00-02

DATE COMMENCED: February 2, 1976  
 DATE COMPLETED: February 16, 1976

Cities Service Oil Co.  
 KRILEY B-1  
 SW SW SW of Sec 15-T8S-R18W  
 Rocks County, Kansas

ELEVATION: 1904 K.B.

0 - 1282'	Shale, Sand, Shells
1282 - 1320'	Anhydrite
1320 - 2105'	Shale, Shells
2105 - 2832'	Lime and Shale
2832 - 3044'	Lime
3044 - 3048'	Shale
3048 - 3085'	Lime and Shale
3085 - 3305'	Lime
3305 - 3425'	Lime and Shale
3425'	RTD

FORMATION TOPS

Anhydrite	1282
Topeka	2832
Heebner	3044
Toronto	3068
Lansing K.C.	3085
Base K.C.	3305
RTD	3425

SURFACE PIPE:

Set 208' of new 8 5/8", 28#  
 pipe w/175 sacks cement, 2% cc.

A F F I D A V I T

STATE OF KANSAS }  
 COUNTY OF BARTON } ss.

Wayne Dobbs, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Wayne Dobbs

Subscribed and sworn to before me this 18th day of February, 1976.

Alaister M. Hague  
 Notary Public

My Commission Expires: April 11, 1978

RECEIVED BY  
 THE COMMISSIONER  
 FEB 19 1976  
 CONSERVATION DIVISION  
 Wichita, Kansas