

15-163-21200-00-00


FORM CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Rooks County, Sec. 15 Twp. 8S Rge. 18W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
SE NW SW  
Lease Owner F & M Oil Company  
Lease Name KRILEY Well No. #1  
Office Address 422 Union Center, Wichita, KS 67202  
Character of Well (Completed as Oil, Gas or Dry Hole)

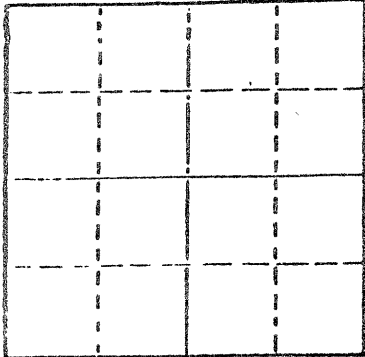

Locate well correctly on above  
Section Plat

Dry Hole  
Date Well completed December 18 19 80  
Application for plugging filed December 18 19 80  
Application for plugging approved December 18 19 80  
Plugging commenced December 18 19 80  
Plugging completed December 18 19 80  
Reason for abandonment of well or producing formation  
No commercial quantity of oil or gas encountered  
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt  
Producing formation Depth to top Bottom Total Depth of Well 3350'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to  
\_\_\_\_\_ feet for each plug set.

T.D. 3350'  
Set 1st Plug @ 740' with 70 sx.  
Set 2nd Plug @ 240' with 25 sx.  
Set 3rd Plug @ 40' Solid Bridge with 10 sx.  
Rathole 5 sx., 50/50 posmix, 6% gel.

Plug was down @ 7:30 a.m., 12/18/80  
State Plugger - Marion Schmidt.



(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.  
Jack L. Partridge, Asst. Sec./Treas. (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge  
801 Union Center, Wichita, KS 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of December, 1980

My commission expires 8-18-81

Jeanette A. Metheny  
Jeanette A. Metheny Notary Public.



15-163-21200-00-00

CONTRACTOR'S WELL LOG

OPERATOR: F & M Oil Company  
 CONTRACTOR: Abercrombie Drilling, Inc.  
 WELL NAME: KRILEY #1  
 LOCATION: SE NW SW, Section 15-8S-18W  
 Rooks County, Kansas  
 SPUD DATE: 12/13/80  
 COMPLETION DATE: 12/18/80

0	1090	Shale & Sand
1090	1313	Shale
1313	1340	Anhydrite
1340	2134	Shale
2134	2644	Shale & Lime
2644	2872	Lime
2872	3034	Shale & Lime
3034	3350	Lime
	3350	RTD

Spud hole @ 1:30 p.m., 12/13/80. Drilled 251' in a 12 1/4" hole. Ran 6 jts. of 8 5/8" - 20# casing (tally 242.14) Set @ 249' RTD. Cemented with 190 sx. of common 3% c.c., 2% gel. Cement did circulate. Plug was down @ 5:00 p.m., 12/13/80.

T.D. @ 3350'. 1st Plug @ 740' with 70 sx. 2nd Plug Set @ 240' with 25 sx. 3rd Plug Set @ 40' Solid Bridge with 10 sx., 5 Sx. in rathole. 50/50 posmix, 6% gel. Plug was down @ 7:30 a.m., 12/18/80. State Plugger - Marion Schmidt.

SAMPLE TOPS:

Anhydrite 1313'  
 B/Anhydrite 1340'

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK )


DEC 31 1980  
 CONSERVATION DIVISION  
 Wichita, Kansas

Jack L. Partridge, Assistant Secretary/Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the KRILEY #1, SE NW SW, Section 15-8S-18W, Rooks County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge  
 Jack L. Partridge, Asst. Sec./Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 30th day of December, 1980.



Jeanette A. Metheny  
 Jeanette A. Metheny, Notary Public