


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

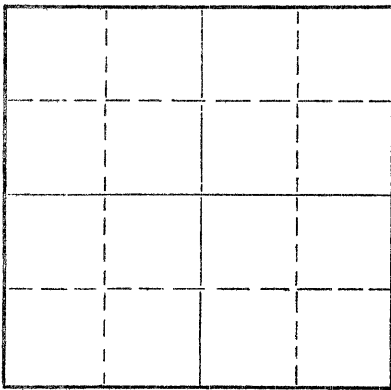

Locate well correctly on above
Section Plat

Rooks County. Sec. 17 Twp. 8S Rge. (E) 18 (W)
Location as "NE/CNW/SW" or footage from lines NW NE SW
Lease Owner CAMERON K. REED
Lease Name SWANSON Well No. 1
Office Address 20 WEST 9TH STREET, KANSAS CITY, MISSOURI
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed DEC. 13, 19 67
Application for plugging filed (PHONE 12-13-67) DEC. 14, 19 67
Application for plugging approved DEC. 13, 19 67
Plugging commenced DEC. 13, 19 67
Plugging completed DEC. 13, 19 67
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well LEO MASSEY
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3480 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	200	8-5/8	200	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

FILLED HOLE WITH HEAVY MUD TO 800 FEET. SET FIRST PLUG @ 800 FEET WITH 100 SACKS CEMENT.
FILLED HOLE WITH HEAVY MUD TO 200 FEET. SET SECOND PLUG @ 200 FEET WITH 24 SACKS CEMENT.
FILLED HOLE WITH HEAVY MUD TO 40 FEET. SET THIRD PLUG @ 40 FEET WITH 1 1/2 SACK HULLS AND
10 SACKS CEMENT TO BOTTOM OF CELLAR. CEMENT PUMPED THROUGH DRILL PIPE BY HALLIBURTON
Co. PLUGGED RAT HOLE WITH 2 SACKS CEMENT. JOB COMPLETE AT 3:15 AM, DECEMBER 13, 1967.

DEC 15 1967

CONSERVATION DIVISION


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor GABBERT-JONES, INC. 12-15-67
Address 830 SUTTON PLACE, WICHITA, KANSAS 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
E. E. HALL (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. Hall
830 SUTTON PLACE, WICHITA, KANSAS 67202
(Address)

SUBSCRIBED AND SWORN to before me this 14TH day of DECEMBER, 19 67

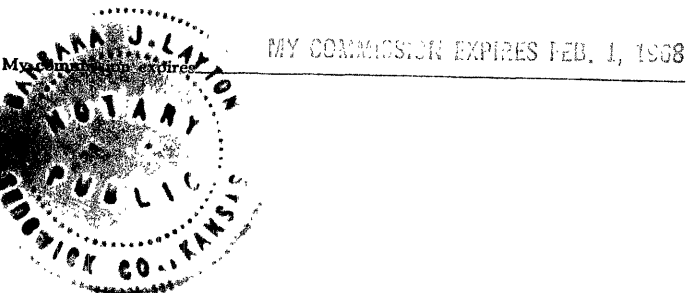

Barbara J. Layton
BARBARA J. LAYTON
Notary Public.

