

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-20440-00-00  
Spot: SESE Sec/Twnshp/Rge: 5-19S-24W  
646 feet from S Section Line, 636 feet from E Section Line  
Lease Name: BORGER Well #: 1  
County: NESS Total Vertical Depth: 4351 feet

Operator License No.: 5144  
Op Name: MULL DRILLING COMPANY, INC.  
Address: 221 N MAIN STE 300 PO BOX 2758  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4341	0	
SURF	8.625	215		WITH 180 SX CMT

\$ 141.41

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 08/24/2007 8:30 AM  
Plug Co. License No.: 5144 Plug Co. Name: MULL DRILLING COMPANY, INC.  
Proposal Rcvd. from: TAVIS Company: MULL DRILLING COMPANY, INC. Phone: (316) 264-6366

Proposed Plugging Method: SAND IN TOP FISH @ 1060'. 1ST PLUG PUMP 100# HULLS & 40 SX CMT AT 1000'. TAG PLUG. TEST CASING. PERFORATE AT 550'. CIRCULATE CMT TO 0'.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 08/24/2007 12:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

SANDED IN FROM CASING LEAK IN CEDAR HILLS AT 1100'. RUN TUBING TO 1000' & PUMPED 40 SX COMMON CMT WITH 3% CC AND 200# HULLS. WAITED 2 HOURS. TAGGED CMT AT 1010'. RUN TUBING AND PACKER IN. TESTED CASING TO 500#. HELD. PERFORATED AT 850'. PUMPED 130 SX CMT. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 200#. TIED ONTO BACKSIDE AND PUMPED 35 SX CMT. PRESSURED TO 500# & HELD.

Perfs:


Top	Bot	Thru	Comments
4338	4351	OH	

**INVOICED**  
DATE 9-19-07  
INV. NO. 2008060429

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 01

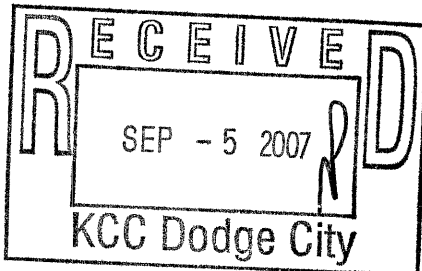

Signed Michael J. Maier  
(TECHNICIAN) RECEIVED

KANSAS CORPORATION COMMISSION

SEP 11 2007

Form CP-2/3

CONSERVATION DIVISION  
WICHITA, KS

*Handwritten initials/signature*