

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-129-21816-00-00  
Spot: SENE Sec/Twnshp/Rge: 15-33S-40W  
1980 feet from N Section Line, 660 feet from E Section Line  
Lease Name: CNG Well #: 15 #1  
County: MORTON Total Vertical Depth: 6115 feet

Operator License No.: 5278  
Op Name: EOG RESOURCES, INC.  
Address: 3817 NW EXPRESSWAY STE 500  
OKLAHOMA CITY, OK 73112

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	1702		WITH 480 SX CMT

\$198.74

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/02/2007 12:00 PM  
Plug Co. License No.: 30684 Plug Co. Name: G & F RESOURCES, INC.  
Proposal Rcvd. from: HERB NUTTER Company: EOG RESOURCES Phone: (405) 246-3100

Proposed Plugging Method: 1ST PLUG AT 5950' WITH 60 SX CMT. 2ND PLUG AT 3075' WITH 50 SX CMT. 3RD PLUG AT 1752' WITH 50 SX CMT. 4TH PLUG AT 590' WITH 40 SX CMT. 5TH PLUG AT 100' WITH 40 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: NONE  
Date/Time Plugging Completed: 09/02/2007 3:00 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

Perfs:


\*\*PLUGGING ORDERS CHANGED BY BLM.\*\* 1ST PLUG AT 6110' WITH 40 SX CMT. 2ND PLUG AT 2950' WITH 35 SX CMT. 3RD PLUG AT 1752' WITH 25 SX CMT. TAGGED TOC @ 1635'. 4TH PLUG AT 490' WITH 25 SX CMT. 5TH PLUG AT 100' WITH 25 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

INVOICED  
DATE 9/20/07  
INV. NO. 2008060442

Remarks: USED 60/40 POZMIX 4% GEL BY HOWCO

Plugged through: DP

District: 01

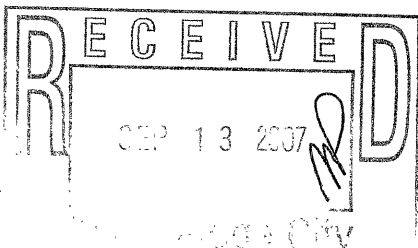

Signed

Richard W. Lacey

RECEIVED  
KANSAS CORPORATION COMMISSION  
(TECHNICIAN)

SEP 17 2007

CONSERVATION DIVISION  
WICHITA, KS

Form CP-2/3