


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-163-03180-00-00
WELL PLUGGING RECORD

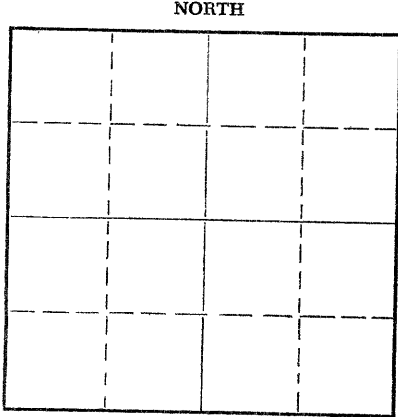

Locate well correctly on above
Section Plat

Rooks County. Sec. 28 Twp. 8 Rge. 19 (E) (W)
Location as "NE/CNW/SW" or footage from lines NE SE SE
Lease Owner MORGENSTERN & SPECTER
Lease Name VEVERKA Well No. 6
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 5-30-47
Application for plugging filed October 11, 1961 19
Application for plugging approved October 12, 1961 19
Plugging commenced November 8, 1961 19
Plugging completed November 25, 1961 19
Reason for abandonment of well or producing formation failure to produce profitably

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation Arbuckle Depth to top 3414 Bottom 3418 1/2 Total Depth of Well 3420 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	241 ft.	none
				5 1/2" OD	3418 1/2'	2580 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3400 feet, Dumped 5-sacks - cement.
Circulated Mud at 550 feet, Pumped 20-sacks cement.
Pumped 20-sacks cement at 180 feet.
Set a rock-bridge at 40 feet, Dumped ten sacks cement.

STATE CORPORATION COMMISSION
Wichita, Kansas
12/7/61

Name of Plugging Contractor LYNCH CASING PULLING COMPANY. NO. 457
Address Rt. 4 GREAT BEND, KANSAS

STATE OF Kansas COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

SUBSCRIBED AND SWORN TO before me this 30th day of November, 1961

My commission expires Feb. 29, 1964
Barbara Fortney Notary Public.



15-163-03160-00-50

DRILLER'S LOG

Company: Bird and Boreing

Location: NE SE SE

Farm: Veverka No. 6

Sec. 28, Twp. 8, Rge. 19W

Total Depth: 3420'

County: Rooks,

Comm.: 5-9-47 Comp.: 5-30-47

Kansas

Contractor: Glenn W. Peel Drilling Co., Inc.

Rotary Tools: 0 -3419

Cable Tools: 3419-3420

Casing: 8-5/8" 241' Cem.
5-1/2" 3418 1/2' Cem.

Elevation:

Production: 91 B0 & 56 BW

Figures Below Indicate Bottom of Formations

Surface clay	0 -	242'
Shale & shells		525
Sand & shale		1000
Sand w/shale streaks		1100
Shale & Shells		1351
Shale & sand		1411
Anhydrite		1448
Shale & shells		1840
Shale & lime		1840
Lime		2285
Lime & shale		2315
Lime		2460
Lime & shale		2540
Lime		2898
Shale & lime		3000
Lime		3075
Total Depth		3420
		3420

RECEIVED
STATE CORPORATION COMMISSION

001 12 1961

CONSERVATION DIVISION
Wichita, Kansas

10/12/61

This is to certify that the above information is to the best of my knowledge true and correct.

PEEL-HARDMAN OIL OPERATORS

BY: _____

SUBSCRIBED AND SWORN TO before me this _____ day of July, 1961.

My commission expires March 4, 1962.

Notary Public