


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15-163-20513-0000
WELL PLUGGING RECORD

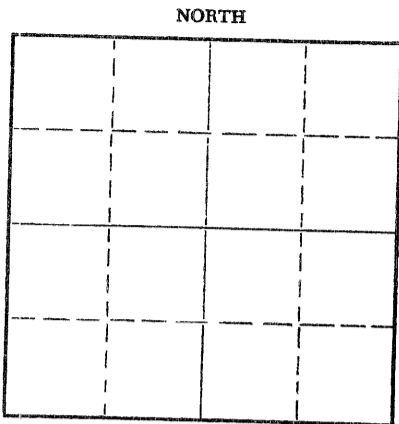

Locate well correctly on above Section Flat

Rooks County. Sec. 28 Twp. 8S Rge. 19W (E) (W)
Location as "NE/CNW/SW" or footage from lines SE NE NW
Lease Owner Sterling Drilling Company
Lease Name Veverka
Office Address P. O. Box 129, Sterling, Kansas Well No. 1 67579
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed _____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced _____ 19____
Plugging completed 9:30 p.m., February 17 _____ 19 74
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3517 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

| FORMATION | CONTENT | CASING RECORD | | | | |
|-----------|---------|---------------|----|------|--------|------------|
| | | FROM | TO | SIZE | PUT IN | PULLED OUT |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug #1 675' 70 sacks cement
Plug #2 185' 20 sacks cement
Plug #3 40' 10 sacks cement
Rathold 2 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
MAR 6 1974
CONSERVATION DIVISION
Wichita, Kansas

3/6/74

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor John O. Farmer, Inc.
Address Box 352, Russell, Kansas 67665


STATE OF KANSAS, COUNTY OF RUSSELL, ss.
John O. Farmer, III (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John O. Farmer III
Box 352, Russell, Kansas 67665 (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of February, 19 74

My commission expires February 15, 1975

Helen Carlson
Helen Carlson Notary Public.



15-163-20513-00-00

DRILLERS LOG

VEVERKA #1

| | | | |
|--------------------------------------|-------------|-----------------------|---|
| CASING RECORD: | OPERATOR: | Sterling Drilling Co. | DESCRIPTION: |
| 195' of 8-5/8" Cemented w/150 sx. | CONTRACTOR: | John O. Farmer, Inc. | SE NE NW SEC. 28-8S-19W Rooks County, Ks. |
| T.D. 3517' | COMMENCED: | February 9, 1974 | ELEVATION: 2047'KB |
| | COMPLETED: | February 17, 1974 | |

| <u>FORMATION</u> | <u>FROM</u> | <u>TO</u> |
|------------------|-------------|-----------|
| Surface | 0 | 201 |
| Shale & Shells | 201 | 400 |
| Shale | 400 | 780 |
| Shale & Sand | 780 | 970 |
| Sand | 970 | 1200 |
| Red Bed | 1200 | 1472 |
| Anhydrite | 1472 | 1507 |
| Shale & Shells | 1507 | 2000 |
| Shale & Lime | 2000 | 3030 |
| Lime & Shale | 3030 | 3195 |
| Lime | 3195 | 3517 |
| Total Depth | 3517 | |

RECEIVED
STATE CORPORATION COMMISSION
MAR 6 1974
CONSERVATION DIVISION
Wichita, Kansas

3/6/74

I certify that this is a true and correct copy of the above log to the best of my knowledge.

JOHN O. FARMER, INC.

By John O. Farmer III
John O. Farmer, III

Subscribed and sworn to before me this 19th day of February, 1974.

Helen Carlson
Helen Carlson

