


15-163-20592-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

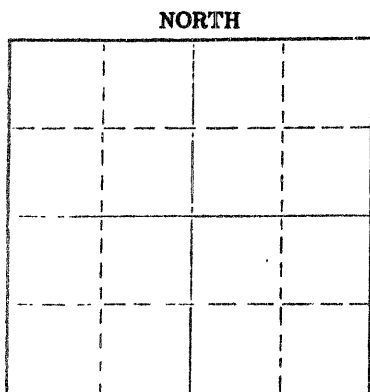

Locate well correctly on above Section Plat

Rooks _____ County. Sec. 28 Twp. 8S Rge. 19W (E) _____ (W)
Location as "NE/CNW/SW" or footage from lines SE NW NW
Lease Owner F & M Oil Co., Inc.
Lease Name VEVERKA Well No. 1
Office Address 505 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 28 19 75
Application for plugging filed December 28 19 75
Application for plugging approved December 28 19 75
Plugging commenced December 28 19 75
Plugging completed December 28 19 75
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3485 feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 550' Set plug w/70 sacks 50/50 Pozmix, 2% Gel thru drill pipe.
Second plug at 185' w/20 sacks 50/50 Pozmix, 2% Gel. Come up to 40' set w/1/2 sack hulls plug and 10 sacks cement.

Name of Plugging Contractor Duke Drilling Co. (If additional description is necessary, use BACK of this sheet)
Address Box 823, Great Bend, Kansas 67530

RECEIVED
STATE CORPORATION COMMISSION
DEC 31 1975
CONSERVATION DIVISION
Wichita, Kansas
12/28/75

STATE OF KANSAS COUNTY OF BARTON
Wayne Dobbs

(employee of owner) or (XXXXXXXXXXXX) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne Dobbs
Box 823, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of December 19 75

My commission expires April 11, 1978
Meredy M. Hague
Notary Public.

15-143-20592-00-00

DRILLERS' WELL LOG

DATE COMMENCED: December 18, 1975
DATE COMPLETED: December 28, 1975

F & M Oil Co., Inc.
WEVERKA # 1
SE NW NW of Sec 26-T8S-R19W
Rooks County, Kansas

ELEVATION: 2048 K.B.

0 - 205'	Shale, Clay, Sand Streaks
205 - 575'	Shale
575 - 1195'	Shale and Sand
1195 - 1290'	Red Bed
1290 - 1469'	Shale and Red Bed
1469 - 1512'	Anhydrite
1512 - 1815'	Shale and Shells
1815 - 2989'	Shale and Lime
2989 - 3197'	Lime
3197 - 3201'	Shale
3201 - 3238'	Shale and Lime
3238 - 3441'	Lime
3441 - 3478'	Lime and Shale
3478 - 3485'	Dolomite
3485'	RTD

FORMATION TOPS

Anhydrite	1469
Topeka	2989
Heebner	3197
Toronto	3223
Lansing	3238
Base K.C.	3441
Arbuckle	3478
RTD	3485

SURFACE PIPS:
Set 205' of used 8 5/8", 28#
pipe w/130 sacks Common,
2% Gal, 3% cc.

AFFIDAVIT

STATE OF KANSAS }
COUNTY OF BARTON } ss.

Wayne Dobbs, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Wayne Dobbs

Subscribed and sworn to before me this 30th day of December, 1975.

Kerathy M. Hague
Notary Public

My Commission Expires: April 11, 1978

RECEIVED
STATE CORPORATION COMMISSION
DEC 31 1975
CONSERVATION DIVISION
Wichita, Kansas

12/31/75