


15-163-02728-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

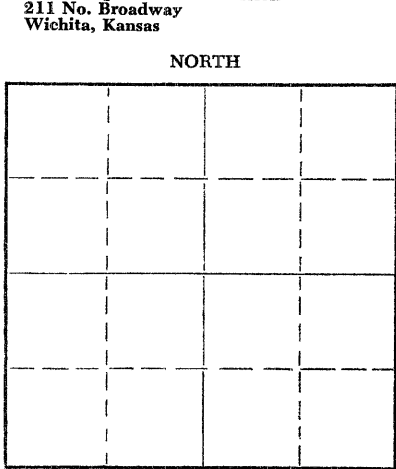

Locate well correctly on above Section Plat

Rooks _____ County. Sec. 15 Twp. 10 Rge. 18 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NE NW SE
Lease Owner Tennessee Gas Transmission Company
Lease Name Henry Flagler Well No. 1
Office Address P. O. Box 513, Chase, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 19 19 57
Application for plugging filed April 19 19 57
Application for plugging approved April 19 19 57
Plugging commenced April 19 19 57
Plugging completed April 19 19 57
Reason for abandonment of well or producing formation oil in commercial quantities not found

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3765' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1509'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with extra heavy rotary mud from total depth to 500'. Set Plug #1 at 500' cemented with 25 sacks cement. Filled hole with extra heavy rotary mud from Plug #1 to 40' Set Plug #2 at 40' cemented with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Prime Drilling Company
Address 814-16 Union Center, Wichita, Kansas

STATE OF KANSAS, COUNTY OF Sedgwick, ss.
R. R. McNicol (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. R. McNicol
814-16 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of April, 19 57

My commission expires September 30, 1959

Darlene May
STATE CORPORATION COMMISSION Notary Public.

PLUGGING
FILE SEC 15 T 10 R 18W
BOOK PAGE 8 LINE 21

APR 24 1957
04-24-1957
CONSERVATION DIVISION
Wichita, Kansas

15-163-02728-00-00

ROTARY DRILLING LOG

OPERATOR: Tennessee Gas Transmission Co.
Henry Flagler No. 1
NE NW SE Sec. 15-10-18
Rooks County, Kansas

CONTRACTOR: Prime Drilling Company
COMM: 4/7/57
COMP: 4/19/57

Remarks: Set 8-5/8" surface casing
at 1509' cemented with 575 sacks
common cement, 7 sx. gel, 8 sx. C.C.

Formations:


Clay & Sand	100'
Sand & Shale	450'
Shale & Shells	780'
Shale & Sand	850'
Shale	985'
Sand & Pyrite	1020'
Shale	1145'
Red Bed & Shale	1415'
Red Bed	1500'
Anhydrite	1540'
Shale & Shells	2025'
Shale & Lime	2320'
Lime	2500'
Lime & Shale	2930'
Shale & Shells	3055'
Shale & Lime	3255'
Lime	3655'
Lime & Chert	3703'
Cherty Conglomerate	3708'
Shale	3716'
Sand	3735'
Arbuckle	3765'
Rotary Total Depth (D&A)	3765'

We certify the above log is true and
correct to the best of our knowledge
and belief.

PRIME DRILLING COMPANY

R. R. McNicol

R. R. McNicol



RECEIVED
STATE CORPORATION COMMISSION
04-24-1957
APR 24 1957

CONSERVATION
WICHITA