

15-163-20388-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Rooks County. Sec. 18 Twp. 10S Rge. (E) 18 (W)

Location as "NE/CNW/SW" or footage from lines SE SE SE

Lease Owner Rains & Williamson Oil Co., Inc.

Lease Name Vohs Well No. 1

Office Address 435 Page Court, 220 W. Douglas, Wichita, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 8-17 19 71

Application for plugging filed 8-17 19 71

Application for plugging approved 8-17 19 71


Plugging commenced 8-17 19 71

Plugging completed 8-17 19 71

Reason for abandonment of well or producing formation No oil or gas found  
in commercial quantities.

If a producing well is abandoned, date of last production ---- 19 --

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

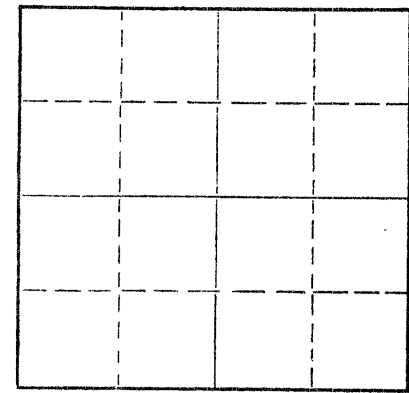

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3763 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	252'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set first plug at 680 feet with 70 sacks;

second plug at 240 feet with 20 sacks;

top plug at 40 feet with 10 sacks.

Plugging completed 8:30 a.m. 8-17-71.

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 30 1971  
CONSERVATION DIVISION  
Wichita, Kansas  
08-30-1971

Name of Plugging Contractor Rains & Williamson Oil Co., Inc.  
Address 435 Page Court, 220 W. Douglas, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. Wilson Rains


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains Wilson Rains  
435 Page Court, 220 W. Douglas, Wichita, Kansas  
(Address)

Subscribed and sworn to before me this 25 day of August, 19 71

My commission expires March 31, 1974

Jeanine Durand Notary Public.



15-163-20388-00-00

ROTARY DRILLING LOG

Operator: Rains & Williamson  
Oil Co., Inc.  
VOHS #1  
SE SE SE Section 18-10S-18W  
Rooks County, Kansas

Contractor: Rains & Williamson  
Oil Co., Inc.  
Commenced: 8-11-71  
Completed: 8-17-71  
Casing: 8-5/8"/252'/160 sacks

Formations

Surface Clay and Sand	45'
Shale	75'
Sand	105'
Shale and Sand	256'
Shale	275'
Shale and Red Bed	1035'
D Sand	1285'
Shale and Red Bed	1570'
Anhydrite	1601'
Shale	2230'
Lime and Shale	3363'
Lime	3730'
Lime and Chert	3763'
Rotary Total Depth	3763'

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 30 1971  
CONSERVATION DIVISION  
Wichita, Kansas  
08-30-1971

We certify the above log is true and correct, to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO., INC.

Wilson Rains  
Wilson Rains

Subscribed and sworn to before me, a Notary Public within and for the State of Kansas, County of Sedgwick, this 25 day of August, 1971.



My Commission Expires: 3-31-74

Jeanine Durand  
Jeanine Durand Notary Public