


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15-163-00732-00-00
WELL PLUGGING RECORD

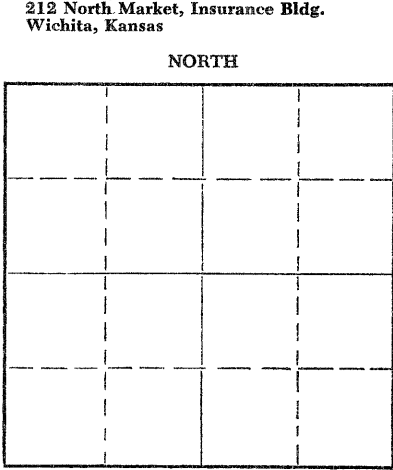

Rooks County. Sec. 25 Twp. 10 Rge. 18 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SW/4 SE/4 NW/4
Lease Owner Davis Brothers
Lease Name Davis Brothers - Shepard Well No. G -1
Office Address 14 east Third St., Tulsa 3, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced Oct. 5 19 61
Plugging completed Oct 7 19 61
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes.

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3675 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3675 feet to surface feet for each plug set.
Well had been plugged back from 3675 to 3442, and top perforations as 3256. Hole filled with sand from 3442 to 3245, and four sacks of cement placed on top of sand with dump bailer; pipe shot off at 2742 and pulled to 550 foot; hole circulated with mud, and twenty sacks of cement pumped down to 550 ft; pipe then pulled to 180 feet; twenty additional sacks of cement pumped down to 180 feet; all pipe pulled from hole and ten sacks of cement poured into hole plugging complete.

RECEIVED
STATE CORPORATION COMMISSION
11-02-1961
NOV 2 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnes and Sons Pine Pulling Co.,
Address Russell, Kansas.

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
Ralph A. Hockenson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ralph A. Hockenson
510 McFarlin Building, Tulsa, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 1 day of November, 19 61

My commission expires November 18, 1963
Morton G. Cohen Notary Public.



Davis Bros.

OIL PRODUCERS
510 MC FARLIN BLDG.
PHONE LU 4-2471
TULSA, OKLAHOMA

15-163-00732-00-00

SHEPARD "G", WELL #1
SW SE NW, Section 25, 10-S, 18-W
Rooks County, Kansas

Well Log

Elevation	2021'	- R.B.
Topeka	2995'	(-974)
Heebner	3214'	(-1193)
Toronto	3230'	(-1209)
Lansing	3256'	(-1235)
Base KC	3488'	(-1467)
Conglomerate	3518'	(-1497)
Simpson	3570'	(-1549)
Arbuckle	3625'	(-1604)
Total Depth	3675'	(-1654)

RECEIVED
STATE CORPORATION COMMISSION

NOV 2 1961
11-02-1961
CONSERVATION DIVISION
Wichita, Kansas