

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22995-00-00
Spot: NWNE Sec/Twnshp/Rge: 7-32S-13W
330 feet from N Section Line, 915 feet from E Section Line
Lease Name: BROOK A Well #: 1
County: BARBER Total Vertical Depth: 4730 feet

Operator License No.: 5046
Op Name: RAYMOND OIL COMPANY, INC.
Address: 155 N MARKET STE 800 PO BOX 48788
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4498	2930	WITH 250 SX CMT
SURF	10.75	256		WITH 250 SX CMT

\$ 153.73

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/31/2007 3:45 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: FELIX TOBAR Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: PLUG BACK WITH SAND TO 3500' WITH 4 SX CMT. PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. PLUG AT 290' WITH 75 SX CMT. PLUG AT 40' WITH 25 SX CMT.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 07/31/2007 6:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SAND BACK TO 3500' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. **WELL BLEW OUT & GASING AT 2170'. WAIT ON CMT.** 1ST PLUG AT 2170' WITH 50 SX CMT. 2ND PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. 3RD PLUG AT 290' WITH 75 SX CMT. 4TH PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4374	4384		


RECEIVED
KANSAS CORPORATION COMMISSION
AUG 06 2007
CONSERVATION DIVISION
WICHITA, KS

INVOICED
DATE 8-9-07
INV. NO. 2008060251

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

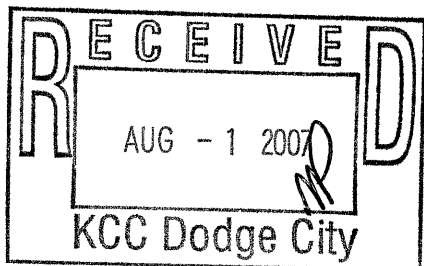

Signed _____

Stephen J. Pfeifer
(TECHNICIAN)

Form CP-73
PKS