


P 15-163-19157-00-00
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail - Deliver Report to:
Conservation Division
State Corporation Commission
1001 No. Broadway
Wichita, Kansas

~~RRR~~ **Rooks** County, Sec. 28 Twp. 8 Rge. 19 (E) (W)

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner MORGENSTERN & SPECTER
Lease Name VEVERKA Well No. 10
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 12-10-54 19____
Application for plugging filed October 11, 1962 19____
Application for plugging approved October 12, 1961 19____
Plugging commenced July 12, 1962 19____
Plugging completed July 13, 1962 19____
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH

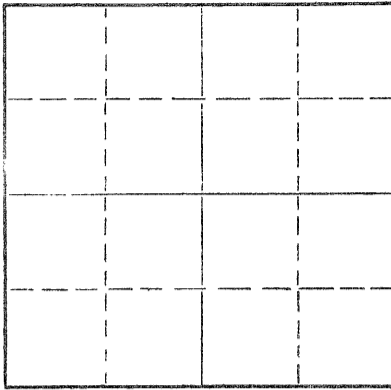

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well ELDON PETTY, HAYS, KANSAS
Producing formation Arbuckle Depth to top 3465 Bottom 3475 Total Depth of Well 3478 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	187 ft.	none
				5 1/2" OD	3475	551 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED, BACK WITH SAND TO 3470 FEET, DUMPED 4 SACKS CEMENT, CIRCULATED MUD AT 550 - FEET. PUMPED 20 SACKS CEMENT AT 180 - FEET, SET A TEN FOOT ROCK BRIDGE AT 40 - FEET. DUMPED TEN CEMENT ON TOP.

RECEIVED
STATE CORPORATION COMMISSION

JUL 1 1962

7/19/62

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor LYNCH CASING PULLING COMPANY NO. 457
Address R.R. T4 GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
(Address) Russell, Kansas

SUBSCRIBED AND SWORN TO before me this 18th day of July, 1962

My commission expires Nov. 4, 1963 Lacey Mark Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY


15-163-19157-00-00

Company- BIRD & PEEL-HARDMAN
Farm- Ververka No. 10

SEC. 20 T. 8 R. 19W
SE SW NE

Total Depth. 3478'
Comm. 10-27-54 Comp. 12-10-54
Shot or Treated.
Contractor.
Issued. 12-3-60

County Rooks KANSAS



CASING:

8" 187'
5" 3475'

Elevation. 2035' RB

Production. 10 BOPD

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE.

TOPS: SCOUT
Hebbner 3180
Lansing 3220
Arbuckle 3465

RECEIVED
OCT 27 1960
CONSERVATION DIVISION
Wichita, Kansas

10/12/62