

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rooks County, Sec. 31 Twp. 8 Rge. 19 (E) (W) x

Location as "NE/CNW/SW" or footage from lines NE SE NE

Lease Owner Okmar Oil Co.

Lease Name Ondrasek Well No. #3

Office Address 1130 Plaza Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed _____ 19__

Application for plugging approved _____ 19__


Plugging commenced 11-19-64 19__

Plugging completed 11-21-64 19__

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

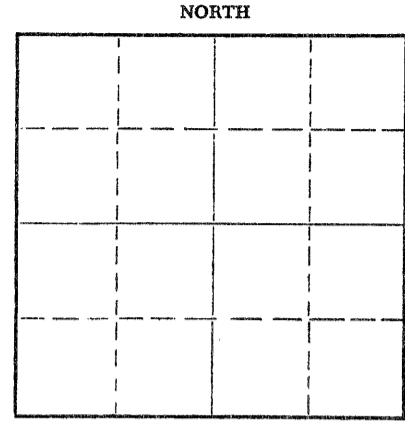

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3506' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
						917.23'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made plug back with sand to 3280', mixed and ran 4 sacks cement thru dump baler.

Mudded hole back to 35' - sat 5' rock bridge. Mixed and dumped 10 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

NOV 24 1964

CONSERVATION DIVISION
Wichita, Kansas

11/24/64

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.

Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.

Box 364, Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 23 day of November, 19 64

Sidney D. Miller
Notary Public.

My commission expires 24 October 1968

HEATHMAN DRILLING COMPANY, INC.
DRILLER'S LOG

15-163-00372-00-00

NE SE NE 31-85-19N - #3 Ondrasch
 Rooks County, Kansas

COMMENCED: 8/14/50
 COMPLETED: 8/25/50

0	115	Shale
115	1000	Shale & shells
1000	1200	Sand
1200	1255	Shale & shells
1255	1518	Shale & shells
1518	1525	Anhydrite
1525	1555	Anhydrite
1555	1700	Shale & lime
1700	1780	Shale & shells
1780	1885	Shale & shells
1885	2060	Shale & shells
2060	2090	Lime & shale
2090	2220	Shale & lime
2220	2335	Shale & lime
2335	2455	Lime & shale
2455	2565	Shale & lime
2565	2655	Shale & lime
2655	2750	Lime & shale
2750	3010	Lime & shale
3010	3096	Lime
3096	3145	Lime
3145	3205	Lime
3205	3248	Lime
3248	3281	Lime
3281	3298	Lime
3298	3503	Lime
3503		ROTARY TOTAL DEPTH

CASING RECORD:

Set 4-5/8" surface casing
 @ 107' w/90 sacks cement.

Set 5-1/2" oil string of
 casing @ 3502'

TOPS

Anhydrite	1518
Topoka	3010
Hrebner	3213
Lansing	3251
Arbuckle	3501
T. D.	3503

STATE OF KANSAS)
)
 COUNTY OF SEDGWICK)

11/20/64

I hereby affirm that the above and foregoing is a true and correct copy of the log of the #3 Ondrasch located in the NE SE NE of Section 31-85-19N, Rooks County, Kansas.

ANSCHUTZ DRILLING COMPANY, INC.

BY:

M. W. Smith
 M. W. Smith

Subscribed and sworn to before me this 30th day of August, 1950.

Tatiana Keuper
 Notary Public

My commission expires January 21, 1954.