


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15-163-02657-00-00
WELL PLUGGING RECORD

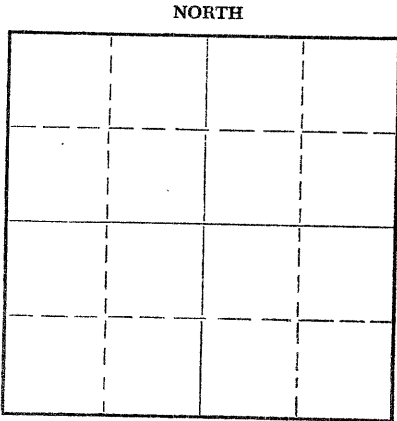

Locate well correctly on above
Section Plat

Rooks _____ County. Sec. 31 Twp. 8S Rge. 19 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE NW SE
Lease Owner Arkansas Louisiana Gas Company
Lease Name McClellan Well No. 1
Office Address Slattery Building, Shreveport 4, Louisiana
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Nov. 17 19 60
Application for plugging filed Nov. 17 19 60
Application for plugging approved Nov. 17 19 60
Plugging commenced Nov. 17 19 60
Plugging completed Nov. 17 19 60
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3608 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	231 1/2'	8-5/8"	231 1/2'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3608' to 500' - Heavy rotary mud
500' to 438' - plug, and 20 sacks cement
438' to 180' - heavy rotary mud
180' to 134' - plug, and 15 sacks cement
134' to 40' - heavy rotary mud
40' to 6' - 1/2 sk. hulls, plug, and 10 sacks cement
6' to 0' - cellar

RECEIVED
STATE CORPORATION COMMISSION
DEC 5 1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PEEL BROTHERS, INC.
Address P. O. Box 359, Hoisington, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Peel Brothers, Inc.

(employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God, PEEL BROTHERS, INC.

(Signature) BY Wendell P. Peel
P. O. Box 359 Hoisington, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22 day of November, 19 60

My commission expires April 27, 1964

Luth Brant
Notary Public.



15-163-02657-00-00

DRILLERS' LOG

Well Owner: Arkansas Louisiana Gas Company SE NW SE
 Farm Name: McClellan Well No. 1 Sec. 31, Twp. 8S, Rge. 19W
 Total Depth: 3608'
 Commenced: 11/5/60 County: Rooks,
 Completed: 11/17/60 Kansas
 Casing: 8 5/8" @ 231 1/2' cem. Elevation:
 Contractor: Peel Brothers, Inc. Production: Dry

Figures below indicate bottoms of formations:

Surface clay	0 -	180
Shale		670
Sand		695
Shale		1030
Shale and sand		1400
Sand		1525
Anhydrite		1567
Shale and lime		2020
Lime		2150
Lime and shale		2280
Lime shells and shale		2360
Lime		2535
Lime and shale		2720
Lime		2790
Lime and shale		3010
Lime		3100
Lime and shale		3225
Lime		3500
Conglomerate		3527
Lime		3608
Total Depth		3608

RECORDED
 DEC 5 1960
 CONSERVATION DIVISION
 Wichita, Kansas
 12/5/60

This is to certify that the above information is to the best of our knowledge, true and correct.

PEEL BROTHERS, INC.

BY: Wendell G. Peel

SUBSCRIBED AND SWORN to before me this 22 day of November, 1960

My commission expires: April 27, 1964

Ruth Brant
Notary Public