

15-163-03185-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rooks County, Sec. 31 Twp. 8 Rge. 19 (E) (W) x

Location as "NE/CNW/SW" or footage from lines SE NE NE

Lease Owner Okmar Oil Company

Lease Name Andrasek Well No. #4

Office Address 820 Union National Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 1-14-64 19

Plugging completed 1-18-64 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

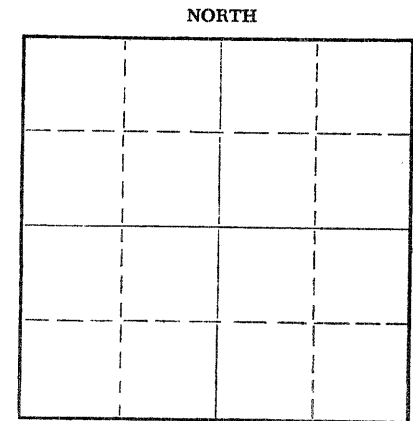

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3510' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. The table is currently empty.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole back to 3500', mixed and ran 4 sacks cement thru dump bailer.
Circulated hole with 15 sacks gel and spotted 20 sacks cement thru 5 1/2" at 600'.
Pulled 13 joints. Spotted 20 sacks cement at 180', pulled 6 joints.
Mudded hole to 35', set 5' rock bridge. Mixed and dumped 10 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

JAN 20 1964

1/20/64

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.

Address Box 364, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Box 364, Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 18 day of January, 19 64

My commission expires 24 October 1964

Erving D. Miller

Notary Public.

70903
NS-163-03185-00-00

T. GARDNER #4 WELL

Location: 28 1/2 N 1/4 Sec. 31-
31-197, Neosho Co., Kansas

Date Spudded: 10-7-60

Operator: Neosho Drilling Co., Inc.

Rotary Completion Date: 10-17-60

Contractor: Neosho Drilling Co., Inc.

Rotary T.D.: 3500'

Surface casing: 5 1/2" (114' overall)
3-5/8" cemented @ 110'
w/10 sacks cement and
1 sack Calcium Chloride.

Elevations: 2852' BP
2824' BS

Oil strings: 2 1/2" (3538' overall)
1-3/4" @ 300' cemented
w/75 sacks @ 3500' (2' off
bottom)

RECEIVED
STATE CORPORATION COMMISSION

JAN 2 1964

CONSERVATION DIVISION
Wichita, Kansas

1/2/64

T.D.S.

anhydrite	3535	(+ 520)
Topsoil	3014	(+ 960)
Neosho	3280	(+ 1160)
Lanning-L.G.	3457	(+ 1303)
Base of L.G.	3476	(+ 1322)
Archie	3507	(+ 1353)
Rotary T.D.	3500'	

L.O.S.

(Figures indicate bottom of formation)

Shale and sand	0 to	114
Shale and shale		110
Sand and shale		1000
Clay		1070
Shale and sand		1100
Shale and shale		1130
Anhydrite		1160
Shale and shale		1110
Shale and lign		1790
Shale		2770
Lign and shale		3201
Lign		3500
Total depth		3500

The undersigned, Robert F. Walters of the Neosho Drilling Co., Inc, hereby certifies that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the Daily Drilling Reports.

NEOSHO DRILLING CO., INC.

By:

Robert F. Walters
Robert F. Walters

Subscribed and sworn to before
me this 19th day of October, 1960.

Mae Reese
Notary Public

My commission expires

My commission expires Mar. 28, 1963