

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

ROOKS

County, Sec. 32 Twp. 8S Rge. 19W (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SE SE

Lease Owner EXCALIBUR CORPORATION

Lease Name HORNER Well No. 1

Office Address 324 McCulloch Bldg. Okmulgee, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE

Date well completed APRIL 3, 1963

Application for plugging filed APRIL 3, 1963

Application for plugging approved APRIL 3, 1963


Plugging commenced APRIL 3, 1963

Plugging completed APRIL 3, 1963

Reason for abandonment of well or producing formation DRY HOLE

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

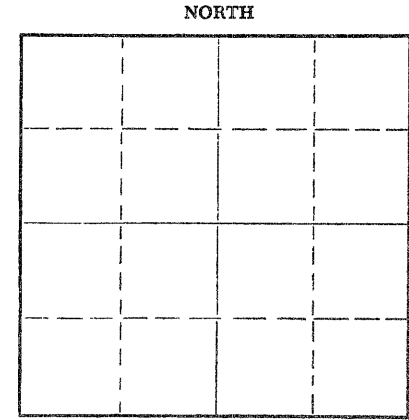

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well ELDON PETTY, HAYS, KANSAS

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3550 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
SAND, CLAY & SHALE	SURFACE CASING	0-	206'	8-5/8"	206'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED HOLE:

Filled hole with heavy mud from 3550' up to 540'.
Set plug, 1/4 sk. hulls, Halliburton plug, 20 sx. cement through drill pipe. Filled hole with heavy mud up to 200'. Set plug, 1/4 sk. hulls, Halliburton plug, 20 sx. cement through drill pipe.
Filled hole to 40' with heavy mud. Set plug, 1/2 sk. hulls, Halliburton plug, 10 sx. cement up to cellar zero.

Job completed: 4 p.m. 4-3-63.

RECEIVED
STATE CORPORATION COMMISSION

APR 5 1963

CONSERVATION DIVISION
Wichita, Kansas

4/5/63

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor SIERRA PETROLEUM CO., INC.

Address 208 PETROLEUM BUILDING, WICHITA, KANSAS

STATE OF KANSAS COUNTY OF RUSSELL, ss.
C. T. HONAKER, DRILLING SUPERINTENDENT

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. T. Honaker C. T. HONAKER, DRLG. SUPT.

BOX 232, RUSSELL, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 4TH day of APRIL, 1963

Leroy Dietz
Notary Public.

My commission expires 10-17-63



INVOICED

DATE 4/5/63

INV. NO. 6851-W

324 Mc Calloch Bldg,
Olathe, Okla

EXCALIBUR CORPORATION - Operator

15-163-01079-00-00
SIERRA PETRO. CO., INC. - Contractor

HORNER #1
SW SE SE
Sec. 32-8S-19W
Rooks County, Kansas

T. D.: 3550'
Elev.: 2038' D.F.

Commenced: 3-27-63
Completed: 4-3-63

Casing:
8-5/8" Set at 206'

Cement:
with 135 sx. Pozmix

FORMATION	DEPTH
Sand & Clay	160
Shale	955
Sand & Shale	1180
Red Bed	1461
Anhydrite	1493
Shale & Shells	2215
Lime & Shale	3010
Lime	3465
Lime & Shale	3520
Arbuckle	3550

RECEIVED
STATE CORPORATION COMMISSION
APR 5 1963
CONSERVATION DIVISION
Wichita, Kansas
4/5/63

STATE OF KANSAS)
COUNTY OF RUSSELL) ss:

I hereby certify that the above information is true and correct to the best of my knowledge.

C. T. Honaker
Drilling Superintendent

Subscribed and sworn to before me this 4th day of April, 1963.

Leroy Dietz
Notary Public

My commission expires: 10-17-63