

15-163-00353-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County, Sec. 28 Twp. 8 Rge. 20 (X) (W)

Location as "NE/CNW%SW%" or footage from lines SE SE SW

Lease Owner Anschutz Drilling Company, Inc.

Lease Name Berland Well No. 1

Office Address Union Nat'l Bk Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12-10 1952

Application for plugging filed 12-10 1952

Application for plugging approved 12-10 1952


Plugging commenced 12-10 1952

Plugging completed 12-10 1952

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

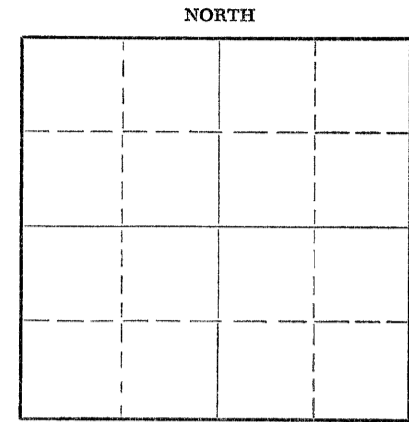

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3648 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	268'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Top plug set at 40' with 10 sacks cement

Bottom plug set at 240' with 15 sacks cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Anschutz Drilling Company, Inc.

Address Union Nat'l Bk Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Leon L. Mehler

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leon L. Mehler
709 Union Nat'l Bk Bldg., Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of December, 19 52

My commission expires May 2, 1956

Jacqueline Hanna
Notary Public.

24-2675-S 2-52-20M

PLUGGING
FILE SEC-28T-R-202
BOOK PAGE 66 LINE 2

CONSERVATION

12-24-52

15-163-00353-00-00

DRILLER'S LOG

#1 Berland
SE SE SW - 28-8S-20W
Rooks County, Kansas

<u>FROM</u>	<u>TO</u>	
0	100	Surface soil & shale
100	273	Sand & shale
273	555	Shale
555	855	Shale, sand & shells
855	1080	Shale
1080	1255	Sand
1255	1390	Shale & sand
1390	1580	Red bed
1580	1615	Anhydrite
1615	2090	Shale & shells
2090	3246	Lime & shale
3246	3504	Lime
3504	3615	Lime & shale
3615	3648	Arbuckle
	3648	TOTAL DEPTH D&A

COMMENCED: 11-28-52
COMPLETED: 12-10-52

CASING RECORD

Set 8-5/8" surface casing at
268' with 150 sacks cement

ELEVATION: 2061 RB

TOPS

Anhydrite 1580
Topeka 3038
Heebner 3254
Toronto 3275
Lansing 3293
Conglomerate 3575
Arbuckle 3613

DRILL STEM TEST

3461-3502, open 45 minutes,
recovered 10' mud with rain-
bow show, BHP 0#, closed 20
minutes.

STATE OF KANSAS)
)
COUNTY OF SEDGWICK)

I hereby affirm that the above and foregoing is a true and correct copy
of the log of the #1 Berland located SE SE SW of Section 28-8S-20W, Rooks
County, Kansas.

ANSCHUTZ DRILLING COMPANY, INC.

BY: *Leon L. Mehler*
Leon L. Mehler

Subscribed and sworn to before me this 23rd day of December, 1952.

Jaqueline L. Luman
Notary Public

My Commission Expires: May 2, 1956

PLUGGING
FILE SEC 28 T 8 R 2034
BOOK PAGE 16 LINE 2