

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

6-21-58

15-005-00439-00-00

JUN 21 1958

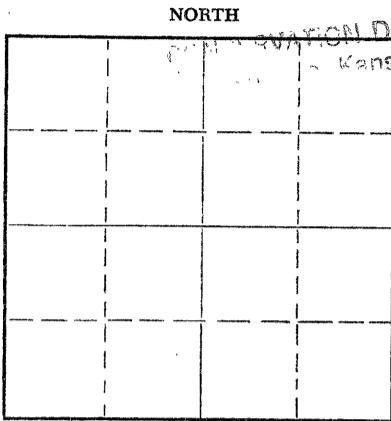

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines C SE/4 NW/4
Lease Owner Forbes Casing Pulling Co.
Lease Name Newell Well No. #1
Office Address Box 221, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed Yes 19____
Application for plugging approved Yes 19____
Plugging commenced 5-26 1958
Plugging completed 6-12 1958
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. A.D. Fabricius
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3690' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	O.D. Casing	
				5 1/2"		2,339'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured into T.D. 3690'.
Plugging started 5-26-58. Finished 6-12-58.
Plugged off bottom, sand found at 3080'. Dumped 4 sacks cement.
Shot 5 1/2" casing at 2,339'. Pulled pipe out of hole and pushed plug to 570'. Set rock bridge and dumped 20 sacks cement. Mudded to 200'.
Set rock bridge and mixed 10 sacks cement for cap on well. Well completed.

Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss. J.O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes
Box 221, Great Bend, Kans. (Address)

SUBSCRIBED AND SWORN to before me this 20th day of June, 1958

My commission expires November 8, 1960. Betty S. Edman Notary Public.

PLUGGING
FILE SEC 221 8 R21W
BOOK PAGE 104 LINE 20

15-065-00439-00-06

SCHERERHORN OIL CORPORATION

NEWELL #1

C 22/4 NW/4 NW/4 Sec. 27-35-21W
Graham County, Kansas

Drilling started 9- 3-54
Drilling completed 9-15-54
5 5/8" O.D. Casing cemented @ 200'
5 1/2" O.D. Casing cemented @ 3463'

<u>From</u>	<u>To</u>	<u>Formation</u>	<u>Remarks</u>
0	70	Rock - Clay	
70	1100	Shale	200' 5 5/8" O.D. Casing cemented @ 200' w/175 sacks
1100	1325	Sand	
1325	1500	Shale & Sand	
1500	1615	Shale & Redbed	
1615	1660	Anhydrite	
1660	1800	Shale	
1800	2400	Line & Shale	
2400	2460	Line	
2460	2695	Line & Shale	
2695	2805	Line	
2805	2925	Line & Shale	
2925	2992	Line	
2992	3312	Line & Shale	
3312	3520	Line	
3520	3625	Line & Shale	
3625	3690	Line & Chert	

Total Depth - 3690'
106 Jts. 5 1/2" Casing set
at 3463' w/100 sacks cement

This is a certified true copy of the Driller's Log as shown on the Daily Drilling Reports.

Lawrence Perkins
DRILLER, INC.

Subscribed and sworn to before me
this 27 day of Oct., 1954

Opal Gulick
Notary Public

My Commission expires 10-20-57

PLUG
WELL SEC. 27 8 21W
BOOK PAGE 104 19