


15-065-21333-06-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202



Locate well correctly on above
Section Plat

Graham County. Sec. 12 Twp. 8 Rge. 21 ☒ NE
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{4}$ " or footage from lines

NE NE NE
Lease Owner Petr-Gas Energies, Inc.
Lease Name Bethell Well No. 1
Office Address 411 Farmers & Bankers Bldg., Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole) Oil

Date Well completed 9/10 1981
Application for plugging filed 12-31 1983
Application for plugging approved 1-3 1984
Plugging commenced 1-3 1984
Plugging completed 2-7 1984
Reason for abandonment of well or producing formation

Not Commercial
If a producing well is abandoned, date of last production Unknown 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Carl Goodrow
Producing formation K.C. Depth to top 3375 Bottom 3444 Total Depth of Well 3489
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 $\frac{1}{2}$		842.26

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Dumped 4 sacks common cement on bottom. Put sand in hole 50 foot over top perforations.

Dumped 4 sacks common cement on top of sand. Shot pipe @ 2582 ft. & 2431 ft. Worked pipe.

Parted @ 842.26 ft.

Used Allied Cementing. Plugged with 3 hulls w/36 gel, 100 sacks cement (50/50 poz., 6% gel,
3% C.C.), followed with 4 sacks gel. Released a 8 5/8" plug & 70 sacks of cement on top of
plug.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pfeifer Well Service, Inc. Contract # 6968

STATE OF Kansas

COUNTY OF

Graham

, ss.

Verlin J. Pfeifer

(employee of ~~xxxxxxx~~) or (owner or operator)


of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature)

P. O. Box 386, Hill City, Kansas 67642
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of April, 1984

My commission expires May 12, 1986

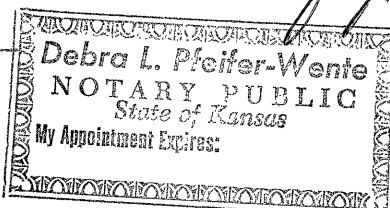

Notary Public.
RECEIVED
STATE CORPORATION COMMISSION
APR 09 1984
4-9-84
CONSERVATION DIVISION
Wichita, Kansas

CONTRACTOR'S WELL LOG

15-065-21333-00-00

OPERATOR: Petro-Energies, Inc.
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: BETHEL #1
 LOCATION: NE NE NE, Section 12-8S-21W
 Graham County, Kansas
 SPUD DATE: 12/06/80
 COMPLETION DATE: 12/12/80

0	100	Sand
100	1527	Sand & Shale
1527	1560	Anhydrite
1560	1863	Shale & Sand
1863	2693	Shale
2693	2936	Shale & lime
2936	3490	Lime
	3490	RTD

Spud @ 3:45 p.m., 12/06/80. Drilled at 354' of a 12 $\frac{1}{4}$ " hole. Ran 6 jts. of 8 5/8" new 24# casing (tally 250') Set @ 257 K.B. with 200 sx. of common cement 2% gel, 3% c.c. Cement circulated. Plug was down @ 9:00 p.m., 12/06/80.

T.D. @ 3490'. Ran 88 jts. of 4 $\frac{1}{2}$ " - 9 $\frac{1}{2}$ # casing (tally 3490') Set @ 3489' RTD. Ran 10 bbl. salt flush, 150 sx. of common 10% salt saturated. Float did hold. Plug was down @ 2:30 p.m., 12/12/80.

SAMPLE TOPS:

Anhydrite 1527'
 B/Anhydrite 1560'

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)


Jack L. Partridge, Assistant Secretary/Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the BETHEL #1, NE NE NE, Section 12-8S-21W, Graham County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
 Jack L. Partridge, Asst. Sec./Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 16th day of December, 1980.

Jeanette A. Metheny
 Jeanette A. Metheny, Notary Public



RECEIVED
 STATE CORPORATION COMMISSION

DEC 30 1983 12-30-83

CONSERVATION DIVISION
 Wichita, Kansas