

15-065-00138-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Graham County. Sec. 13 Twp. 8S Rge. - (E) 21 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SW SW
Lease Owner R. W. Rine Drilling Co. et al
Lease Name Berland Well No. 1
Office Address 320 Central Bldg.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 4/21/50 19
Application for plugging filed 4/21/50 (via telephone) 19
Application for plugging approved 4/21/50 (via telephone) 19
Plugging commenced 4/21/50 5:00 P.M. 19
Plugging completed 4/21/50 8:00 P.M. 19
Reason for abandonment of well or producing formation Dry Hole

NORTH

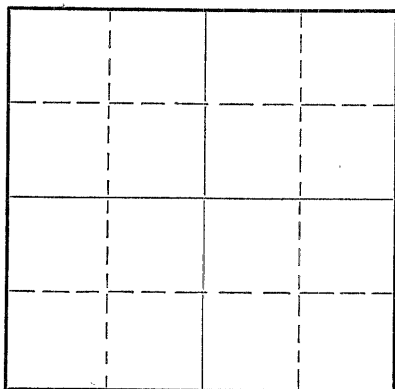

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production - 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? (via telephone 4/21/50) (letter 4/26/50)

Name of Conservation Agent who supervised plugging of this well Eldon Petty - Hays, Kansas
Producing formation None Depth to top - Bottom - Total Depth of Well 3719 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0	295'	8-5/8"	4/12/50	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy Mud from 3719' to 290'.
Wood Plug @ 290' with 15 sx. cement.
Heavy Mud from 290' to 35'.
Wood Plug @ 35' with 10 sx. cement

4-28-50

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The R. W. Rine Drilling Co.
Address 320 Central Building Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E. H. Sloyer (employee of owner) or ~~(owner or operator)~~ of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) E. H. Sloyer
320 Central Building
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of April, 19 50

R. M. Green
Notary Public.

My commission expires May commission expires Dec. 29, 1952

22-7877-s 4-49-10M



Berland Well No. 1

SW SW SW
Sec. 13-8S-21W
Graham County, Kansas

Log

Sand, dirt	0-	75	
Shale	75-	105	
Sand, shale	105-	295	Set 8-5/8" w/ 175 sx. cement
Cement	270-	295	
Shale	295-	340	
Shale, shells	340-	730	
Sand	730-	825	
Shale, shells	825-	1613	
Anhydrite	1613-	1651	
Red bed, shells	1651-	1760	
Shale, shells	1760-	1950	
Lime	1950-	2135	
Lime, shale	2135-	2825	
Shale	2825-	2915	
Lime	2915-	2960	
Lime	2960-	3580	
Lime, shale	3580-	3715	TD

Schlumberger Tops

Kansas City	3328'
Conglomerate	3618'
Arbuckle	3673'
T.D.	3719'

428-50

State of Kansas)
County of Sedgwick) ss

I, E.H. Sloyer, do hereby certify that the above is a true and accurate log of the Berland Well No. 1 well in the SW SW SW of Sec. 13-8S-21W, Graham County, Kansas.

E. H. Sloyer
Secretary

Sworn to and subscribed before me this 25th day of April, 1950.

My commission expires Dec. 29, 1952

R. M. Green
Notary Public

