


15-065-00413-00-00

Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

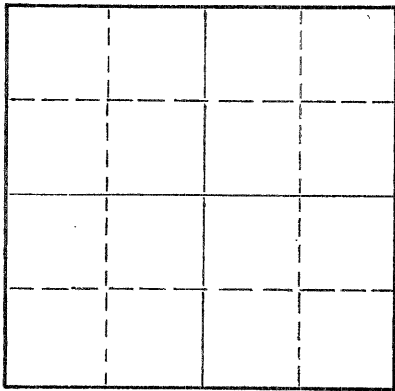

Locate well correctly on above  
Section Plat

Graham County. Sec. 15 Twp. 8 Rge. 21 (E) W (W)  
Location as "NE/CNW%SW%" or footage from lines NW NW NW  
Lease Owner Trans Era Petroleum, Inc.  
Lease Name Sayes "C" Well No. 1  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 12/24/54 19  
Application for plugging filed 12/22/54 19  
Application for plugging approved 12/22/54 19  
Plugging commenced 12/23/54 19  
Plugging completed 12/23/54 19  
Reason for abandonment of well or producing formation Dry Hole  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Eldon Petty

Name of Conservation Agent who supervised plugging of this well  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3518 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	198'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

PLUGGING RECORD

Finished laying down drill pipe. Filled hole with heavy mud to 190', set first plug at 190' with 15 sacks of cement and one-half sack of hulls mixed and run through drill pipe. Filled hole with mud to 40', set second plug at 40' with one-half sack of hulls and 10 sacks of cement used.


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Trans Era Petroleum, Inc.  
Address Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.  
H. R. Michaelis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *H. R. Michaelis*  
Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 28th, day of December, 19 54

My commission expires 1-30-57  
*Margie Cooper* Notary Public.



12-31-54

15-065-00413-00-00

Trans Era Petroleum, Inc.  
Sayer "C" #1

NW NW NW 15-8-21W  
Graham County, Ks.

Total Depth: 3518'  
Comm. 12/14/54  
Comp. 12/24/54

Casing

8 5/8" Set @ 198'

Cement

140 sacks Victor

FORMATION	DEPTH
Surface soil-sand	40
Gravel-shells	70
Shale-shells	505
Shale-sand	565
Sand	650
Shale	770
Shale-shells	1050
Sand	1275
Redbed-shale	1542
Anhydrite	1577
Redbed-shale	1625
Shale-shells	2145
Lime-shale	3230
Lime	3518'

STATE OF KANSAS )  
                          ) ss  
RUSSELL COUNTY )

I hereby certify that the above information is true and correct to the best of my knowledge.

Carly B. [Signature]

Subscribed and sworn to before me this 28th day of December, 1954.

Margie Casper  
Notary Public

My commission expires: 1-30-57.

12-31-54

PLUGGING  
FILE SEC 15 T 8 21W  
BOOK PAGE 87 LINE 10