

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-097-20778-00-00
Spot: SENE Sec/Twnshp/Rge: 13-27S-16W
3300 feet from S Section Line, 660 feet from E Section Line
Lease Name: HOFF Well #: 1-13
County: KIOWA Total Vertical Depth: 4776 feet

Operator License No.: 3959
Op Name: SIROKY OIL MANAGEMENT
Address: PO BOX 464
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4775	2000	WITH 200 SX CMT
SURF	8.625	357		WITH 200 SX CMT \$155.22

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/24/2007 9:00 AM
Plug Co. License No.: 33093 Plug Co. Name: GENESIS WELL SERVICE, INC.
Proposal Rcvd. from: SCOTT ALBERG Company: SIROKY OIL Phone: (620) 672-5713

Proposed Plugging Method: SET CIBP @ 4400' & 2 SX CMT WITH BAILER OR SAND 50' ABOVE PERFS & 4 SX CMT WITH BAILER. FREE POINT CASING & PULL TO 1080'. LOAD HOLE WITH GEL WATER. PUMP 50 SX CMT. PULL CASING TO 390' & PUMP 65 SX CMT. PULL CASING TO 60' & PUMP 20 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: NONE
Date/Time Plugging Completed: 09/24/2007 11:00 AM KCC Agent: STEVE DURRANT

Actual Plugging Report:

TAGGED BOTTOM AT 4600'. SAND TO 4375' & 4 SX CMT. FREEPOINT CASING. LOAD HOLE WITH GEL WATER. 1ST PLUG AT 1080' WITH 50 SX CMT. 2ND PLUG AT 390' WITH 65 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. GOOD CIRCULATION.

Perfs:


Top	Bot	Thru	Comments
4608	4612		
4424	4431		

INVOICED
DATE 10/3/07
INV. NO. 2008060540

Remarks: USED 60/40 POZMIX 4% GEL BASIC ENERGY.

Plugged through: CSG

District: 01

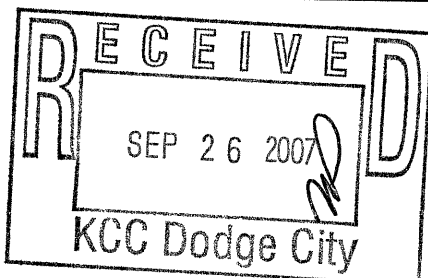

Signed

Steve Durrant
(TECHNICIAN)

Form CP-2/3
OCT 30 2007
KANSAS CORPORATION COMMISSION
Conservation Division
Wichita, KS