

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22960-00-00
Spot: W2E2SE Sec/Twnshp/Rge: 24-31S-12W
1320 feet from S Section Line, 990 feet from E Section Line
Lease Name: CHAIN GANG Well #: 1
County: BARBER Total Vertical Depth: 4698 feet

Operator License No.: 3532
Op Name: CMX, INC.
Address: 1551 N WATERFRONT PKWY STE 150
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4220		WITH 2 SX CMT
COND	13.38	55		WITH 75 SX CMT
PROD	4.5	4698	3300	WITH 225 SX CMT
SURF	8.625	329		WITH 250 SX CMT

\$ 152.69

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 09/24/2007 3:00 PM
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION
Proposal Rcvd. from: JOHN SWINFORD Company: CLARKE CORPORATION Phone: (620) 886-5665

Proposed Plugging Method: SET CIBP @ 4220' & 2 SX CMT. PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. PLUG AT 350' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/24/2007 3:45 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 4220' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. LAID DOWN 4 1/2" CASING & RUN 2 3/8" TUBING TO PLUG THROUGH, 1ST PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 350' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT. **RUN 200# HULLS IN WITH GEL & FIRST 50 SX CMT.**

Perfs:


Top	Bot	Thru	Comments
4270	4300		

INVOICED
DATE 10/15/07
INV. NO. 2008060568

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

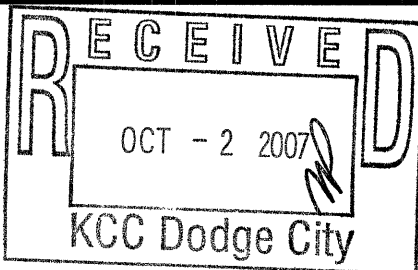

Signed _____

Stephen J. Pfeifer
KANSAS CORPORATION COMMISSION
(TECHNICIAN)

OCT 09 2007

CONSERVATION DIVISION
WICHITA, KS

Form CP-2/3